


BIS L-409-045-001-07-S4

BALLUFF
sensors worldwide

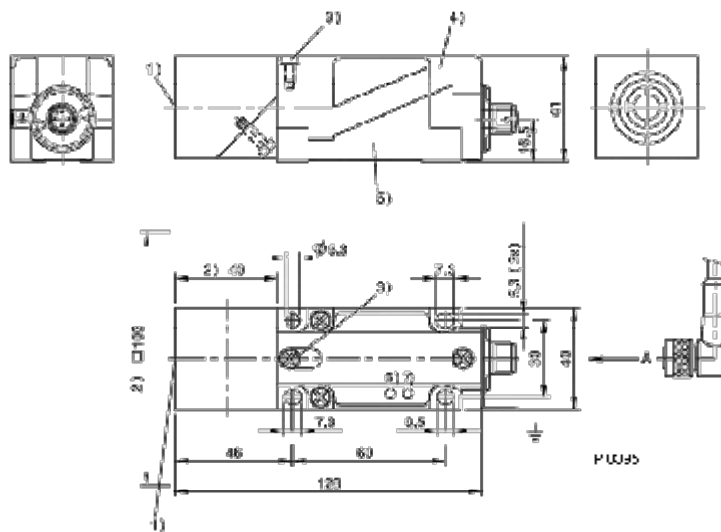

Electrical data:

Connection
Supply Voltage

M12 Connector 4 pin
24 DC +10/-20% (inkl.
ripple) V

General data:

Funktion
LED Controls

readonly
yes

Mechanical data:

Antenna
Housing material
Weight
Storage temperature
Size

round
PBT
220 g
-20...85 °C
40x41x120 mm


www.balluff.com

Ba luff Europe: +49 7158 173 -3
Ba luff USA: 1-800-54 3-83 90
Ba luff Asia: +86 21-50 64 41 31

Online Productinformation
20C8-D7-03

BIS L-409-045-002-07-S4

BALLUFF
sensors worldwide

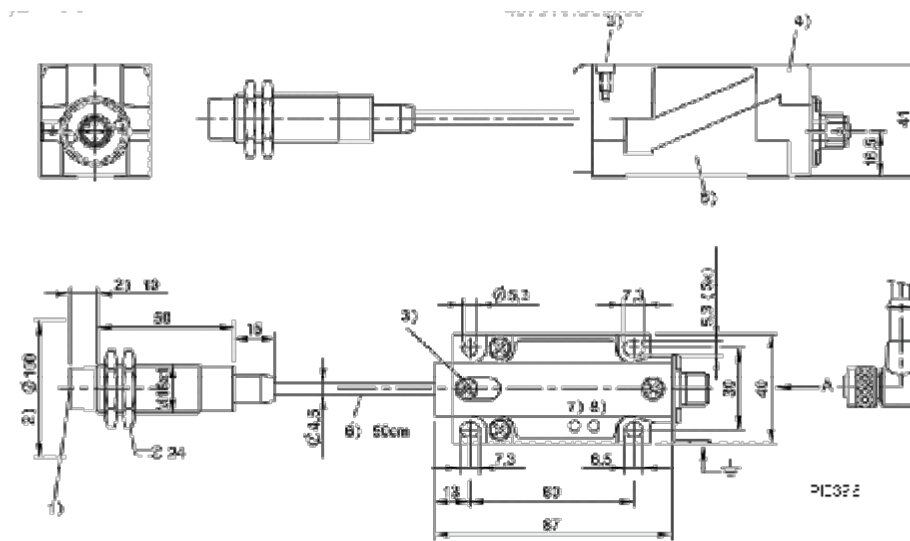

Electrical data:

Connection
Supply Voltage

M12 Connector 4 pin
24 DC +10/-20% (inkl.
ripple) V

General data:

Funktion
LED Controls

readonly
yes

Mechanical data:


Antenna
Housing material
Weight
Storage temperature
Size

round
PBT
200 g
-20...+85 °C
40x41x120 mm

www.balluff.com

Ba lluff Europe: +49 7158 173 -0
Ba lluff USA: 1-800-54 3-83 90
Ba lluff Asia: +86 21-50 64 41 31

Online Productinformation
20C8-D7-03

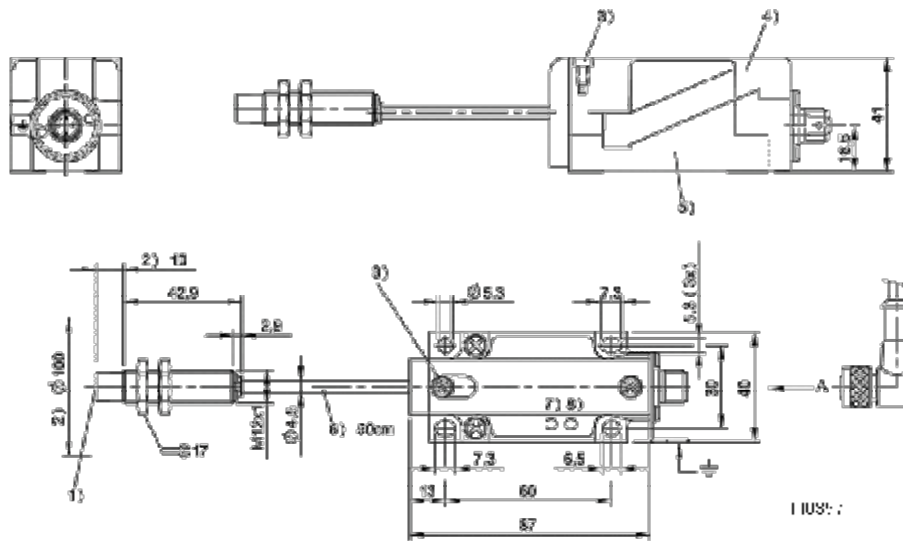**Electrical data:**

Connection
Supply Voltage

M12 Connector 4-pin
24 DC +10/-20% (inkl.
ripple) V

General data:

Funktion
LED Controls

readonly
yes

Mechanical data:


Antenna
Housing material
Weight
Storage temperature
Size

round
PBT
170 g
-20...85 °C
40x41x120 mm

www.balluff.com

Ba luff Europe: +49 7158 173-3
Ba luff USA: 1-800-54 3-83 90
Ba luff Asia: +86 21-50 64 41 31

Online Productinformation
20C8-D7-03

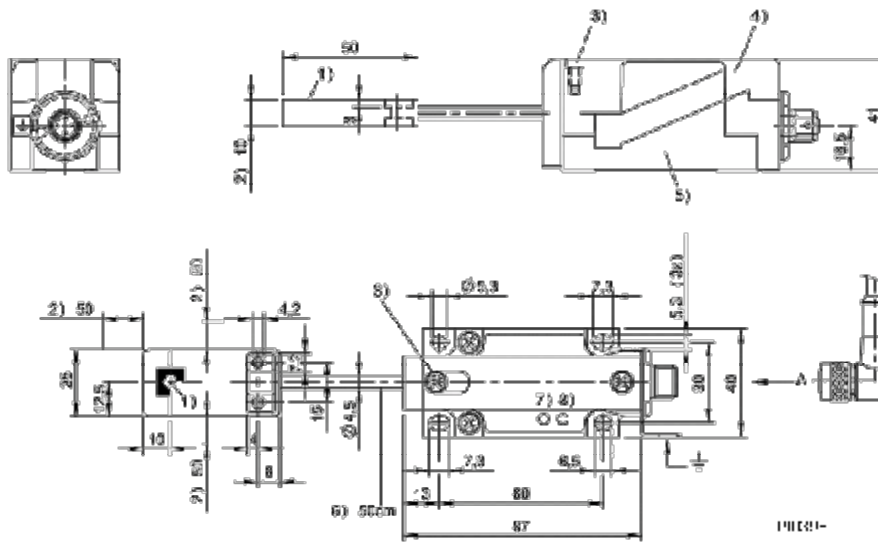**Electrical data:**

Connection
Supply Voltage

M12 Connector 4 pin
24 DC +10/-20% (inkl.
ripple) V

General data:

Funktion
LED Controls

readonly
yes

Mechanical data:

Antenna
Housing material
Weight
Storage temperature
Size

round
PBT
170 g
-20...85 °C
40x41x120 mm

www.balluff.com

Ba luff Europe: +49 7158 173 -0
Ba luff USA: 1-800-54 3-83 90
Ba luff Asia: +86 21-50 64 41 31

Online Productinformation
20C8-D7-03