

Z-GATEWAY

GATEWAY MODBUS RTU ↔ MODBUS TCP-IP, DUAL RS485 PORT



Transparent Conversion for RS485 ↔ Ethernet communication

Built-in Webserver

N°2 RS485 ports, individually configurable

N°1 mini USB port 2.0 type B

N°1 RJ45 port, Ethernet 10/100 Mbps

Protocols ModBUS RTU Master, ModBUS TCP-IP, http

Reading ModBUS registers every 100 ms


Configurable parameters: IP address, baud rate serial port, mapping addresses MODBUS of slave nodes on the buffer

Configuration through DIP-switches, web interface, software Easy Setup (free download)



Z-GATEWAY

GATEWAY MODBUS RTU ↔ MODBUS TCP-IP, DUAL RS485 PORT

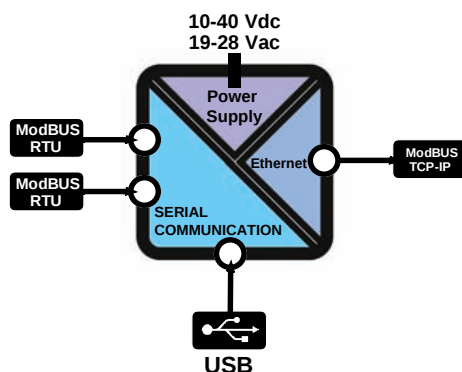

TECHNICAL SPECIFICATIONS

GENERAL DATA

Power Supply	11..40 Vdc; 19..28 Vac
Consumption	Max 3,5 W
Isolation	1.500 Vac (power supply// remaining circuits)
Status indicators	Serial communication Connection IP / DHCP Ethernet Transmission Ethernet Connection
Protection degree	IP20
Operating Temperature	-0..+55°C
Weight	250 g
Dimensions	100 x 112 x 17,5 mm (hxdxw)
Housing	PBT, black
Connectors	Removable screw terminals 2,5 mm ²
Mounting	DIN 35 mm rail guide

COMUNICATION

Interfaces	N°2 RS485 N°1 mini USB 2.0 type B N°1 RJ45 Fast Ethernet 10/100 Mbps
Protocols	ModBUS RTU Master ModBUS TCP-IP / http
Memory	CPU 32 bit 512 kB flash 128 kB RAM

CONFIGURATION

Programming	Software EASY SETUP Web server Dip-switch
--------------------	---

STANDARD


Certifications	CE
Norms	EN 61000-6-4 EN 64000-6-2 EN 61010-1

ORDER CODES

Code	Description
Z-GATEWAY	Gateway ModBUS TCP-IP / ModBUS RTU with dual RS485 ports, 11-40 Vdc; 19-28 Vac, USB cable included

Z-GATEWAY is a industrial gateway consisting of three main units: 1) ModBUS RTU Master (collects and updates the buffer with the registers of the MODBUS slave devices); 2) Buffer memory (keep the data of ModBUS slave devices); 3) ModBUS TCP server (accepts requests from the Ethernet registerers). Powered over clamps or bus, Z-GATEWAY allows the Modbus conversion TCP – Modbus RTU up to 500 register and reading real time variables via webserver. The module is equipped with two independent RS485 ports (1 on bus IDC10, 1 on clamps) and 2 ModBUS TCP sockets. The configuration and firmware upgrade is via USB port, software configuration EASY SETUP or programming interface are based on the webserver.

APPLICATION NOTE

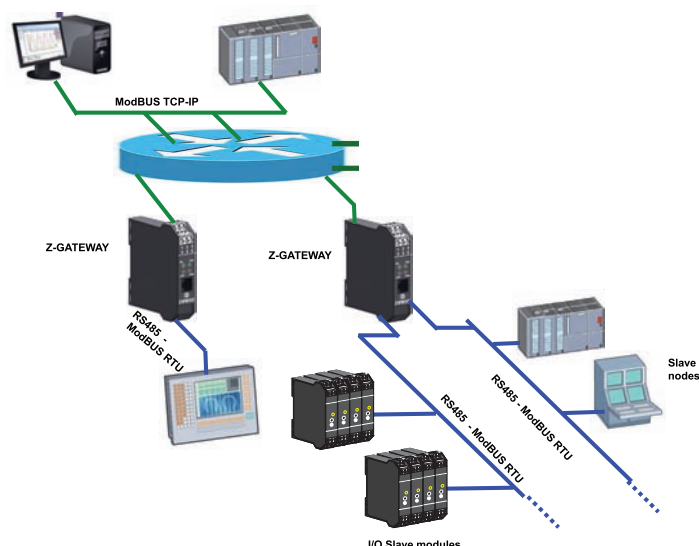

ACCESSORIES & SOFTWARE



EASY SETUP

Plug&Play programming software free download
www.seneca.it



PM001450

Right Ethernet cable (RJ45 / RJ45)



PM001460

Crossing Ethernet cable (RJ45 / RJ45)

SIMILAR PRODUCTS



Z-ALARM

Alarm management device, datalogger with built-in I/O



Z-LOGGER

Datalogger Modbus RTU / Modbus TCP



Z-BRIDGE2

Bridge ModBUS TCP-IP / ModBUS RTU with dual serial portsB



via Germania, 34 • 35127 Padova - (I) - Tel. +39 049 87.05.359 (.408)
Fax +39 049 87.06.287 • www.seneca.it • info@seneca.it

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, SENECA assumes no liability resulting from errors or omissions, or from the use of the information contained herein.