


Fieldbus Coupler for EtherCAT®

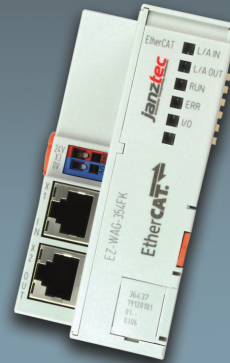

Features

EtherCAT

- Max. no. of couplers connected to Master is limited by EtherCAT specification
- Transmission medium Twisted Pair 2 x 2 or 4 x 2; AWG 26/7 to AWG 22/1; SF/FTP, SF/UTP or S/FTP; 100 Ω, Cat 5
- Max. line length: 100 m
- Baud rate: 100 MBit/s
- Bus coupler connection 2 x RJ-45
- DIN Rail mounting
- No. of I/O modules: 1

Fieldbus

- Max. input process image: 1024 Byte
- Max. output process image: 1024 Byte
- Configuration via PC or PLC, e.g. CoDeSys
- Conformity CE, UL 508

Physical


- Operating temperature range 0...55 °C
- Storage temperature -25 °C ... +85 °C
- Humidity 0...80 %, non-condensing
- Voltage supply DC 24 V (-15 % /+ 20 %)
- Total current for the I/O modules 650 mA
- Degree of protection IP 20
- Dimensions (w x h x d) 65 x 50 x 97 mm
- Weight approx. 100 g

Identical Features as WAGO's EtherCAT Fieldbus Coupler
Artikel Number: 750-354

Ordering Information

- EtherCat-Feldbuskoppler **EZ-WAG-354FK**
2 x RJ 45; DIN Rail Mounting

Contact your Janz Tec sales office for more information

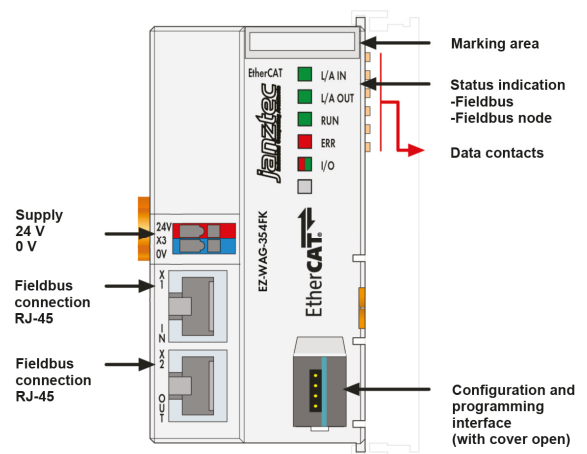

Contact Information

Janz Tec AG
Im Doerener Feld 8
33100 Paderborn
Germany

Phone +49.52 51.15 50.0
Fax +49.52 51.15 50.190
E-Mail sales@janztec.com
Web www.janztec.com