

Absolute encoders - singleturn

Standard, ATEX/IECEx – zone 1/21
optical

Sendix 7053 / 7073 (shaft / hollow shaft)

SSI / BiSS



The Sendix 7053 / 7073 absolute encoders – singleturn offer Ex protection in a compact 70 mm seawater durable aluminum housing, with an SSI or BiSS interface and optical sensor technology.

These shock and vibration-resistant encoders operate flexibly with a resolution of up to 17 bits; they are also available with axial and radial cable outlets.



Ex approval



Safety-Lock™



High rotational speed



High protection level



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Short-circuit proof



Reverse polarity protection



Optical sensor



Seawater durable

Absolute encoders
singleturn

Compact and safe

- Can be used even when space is tight.
- Minimal installation depth, diameter 70 mm.
- Compact cable outlet axial or radial.
- Can be operated in marine environments – housing and flange manufactured from seawater durable aluminum.
- Remains sealed even in harsh everyday use and ensures highest safety against field breakdowns (IP67 protection).

Explosion protection

- “Flameproof-enclosure” version.
- ATEX with EC type examination certificate.
- IECEx with certificate of conformity (CoC).

Order code

Shaft version

8.7053 . 1 X 2 X . X X 2 1 . XXXX
Type a b c d e f g h i ¹⁾

a Flange

1 = clamping / synchronous flange, IP67, ø 70 mm [2.76"]

b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat
1 = 12 x 25 mm [0.47 x 0.98"], with keyway
for 4 x 4 mm [0.16 x 0.16"] key

c Interface / power supply

2 = SSI, BiSS / 10 ... 30 V DC

d Type of connection

1 = axial cable, 2 m [6.56'] PUR
2 = radial cable, 2 m [6.56'] PUR
A = axial cable, length > 2 m [6.56']
B = radial cable, length > 2 m [6.56']

e Code

B = SSI, binary
C = BiSS, binary
G = SSI, gray

f Resolution ²⁾

A = 10 bit
1 = 11 bit
2 = 12 bit
3 = 13 bit
4 = 14 bit
7 = 17 bit

g Inputs / outputs ²⁾

2 = SET, DIR input
additional status output

h Options

1 = no option

i Cable length in dm ¹⁾

0050 = 5 m [16.40']
0100 = 10 m [32.81']
0150 = 15 m [49.21']

Optional on request

- special cable length
- other resolutions
- IP65 version for T6
- seawater resistant (stainless steel V4A)

Stainless steel V4A as standard types
(deliverable as from 1 unit)

8.7053.2221.XX21.V4A
8.7053.222A.XX21.XXXX-V4A



1) Not applicable with connection types 1 and 2.

2) Resolution, preset value and counting direction factory-programmable.

Absolute encoders - singleturn

Standard, ATEX/IECEX – zone 1/21 optical	Sendix 7053 / 7073 (shaft / hollow shaft)	SSI / BiSS
---	--	-------------------

Order code Hollow shaft	8.7073 Type	.XX2X.XX21.XXXX a b c d e f g h i ¹⁾	
a Flange 1 = with spring element, short 5 = with stator coupling, IP67, ø 65 mm [2.56"]	e Code B = SSI, binary C = BiSS, binary G = SSI, gray	i Cable length in dm ¹⁾ 0050 = 5 m [16.40'] 0100 = 10 m [32.81'] 0150 = 15 m [49.21']	
b Blind hollow shaft (insertion depth max. 41.5 mm [1.63"]) 1 = ø 12 mm [0.47"] 2 = ø 14 mm [0.55"]	f Resolution ²⁾ A = 10 bit 1 = 11 bit 2 = 12 bit 3 = 13 bit 4 = 14 bit 7 = 17 bit	Optional on request - special cable length - other resolutions - IP65 version for T6 - seawater resistant (stainless steel V4A)	
c Interface / power supply 2 = SSI, BiSS / 10 ... 30 V DC	g Inputs / outputs ²⁾ 2 = SET, DIR input additional status output	Stainless steel V4A as standard types (deliverable as from 1 unit) V4A 1.4404 8.7073.2221.XX21-V4A 8.7073.222A.XX21.XXXX-V4A	
d Type of connection 1 = axial cable, 2 m [6.56'] PUR 2 = radial cable, 2 m [6.56'] PUR A = axial cable, length > 2 m [6.56'] B = radial cable, length > 2 m [6.56']	h Options 1 = no option		

Mounting accessory for shaft encoders	Order no.
Coupling bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	8.0000.1102.1010

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Explosion protection Sendix 7053		Explosion protection Sendix 7073	
ATEX		ATEX	
EC type-examination certificate	PTB09 ATEX 1106 X	EU type-examination certificate	IBExU 15 ATEX 1091 X
Category (gas)	Ex II 2 G Ex d IIC T4 - T6 Gb	Category (gas)	Ex II 2 G Ex db IIC T4/120°C (T4)/T6 Gb
Category (dust)	Ex II 2 D Ex tb IIIC T135°C - T85°C Db	Category (dust)	Ex II 2 D Ex tb IIIC T135°C - T85°C Db
Relevant standards ATEX guideline 94/9/EC	EN 60079-0:2012; EN 60079-1:2014; EN 60079-31:2009	Relevant standards ATEX guideline 2014/34/EU	EN 60079-0:2012 + A11:2013; EN 60079-1:2014; EN 60079-31:2014
IECEX		IECEX	
Certificate of Conformity (CoC)	IECEX PTB 13.0026 X	Certificate of Conformity (CoC)	IECEX IBE 15.0020 X
Category (gas)	Ex d IIC T4 - T6 Gb	Category (gas)	Ex db IIC T4/120°C (T4)/T6 Gb
Category (dust)	Ex tb IIIC T135°C - T85°C Db	Category (dust)	Ex tb IIIC T135°C - T85°C Db
Relevant standards	IEC 60079-0:2011; IEC 60079-1:2014; IEC 60079-31:2008	Relevant standards	IEC 60079-0:2011; IEC 60079-1:2014; IEC 60079-31:2013
Electrical characteristics		EMC	
Power supply	10 ... 30 V DC	Relevant standards	EN 55011 class B:2009 / A1:2010 EN 61000-6-2:2005 / AC:2005 EN 61000-6-3:2007 / A1:2011 EN 61326-1:2013
Current consumption (no load)	max. 45 mA		
Reverse polarity protection for power supply	yes		
Short-circuit proof outputs	yes ³⁾		
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU		

1) Not applicable with connection types 1 and 2.
2) Resolution, preset value and counting direction factory-programmable.
3) Short-circuit with 0 V or output, only one channel at a time, power supply correctly applied.

Absolute encoders - singleturn

Standard, ATEX/IECEX – zone 1/21 optical	Sendix 7053 / 7073 (shaft / hollow shaft)	SSI / BiSS
---	---	------------

Mechanical characteristics		
Maximum speed	shaft	6000 min ⁻¹ (continuous)
	hollow shaft	3000 min ⁻¹ (continuous)
Starting torque - at 20°C [68°F]		< 0.05 Nm
Mass moment of inertia		4.0 x 10 ⁻⁶ kgm ²
Load capacity of shaft	radial	80 N
	axial	40 N
Weight		approx. 1.5 kg [52.91 oz]
Protection acc. to EN 60529		IP67
Ambient temperature		-40°C ... +60°C [-40 ... +140°F] Please note the specifications for temperature class in EC type-examination certificate!
Material	shaft	stainless steel
	flange / housing	seawater durable Al, type AlSiMgMn (EN AW-6082)
	cable	PUR
Shock resistance to EN/IEC 60068-2-27		2500 m/s ² , 6 ms
Vibration resistance to EN/IEC 60068-2-6		100 m/s ² , 55 ... 2000 Hz

SSI interface		
Output driver		RS485 transceiver type
Permissible load / channel		max. +/- 20 mA
Signal level	HIGH	typ 3.8 V
	LOW at I _{Load} = 20 mA	typ 1.3 V
Resolution		10 ... 14 bit and 17 bit
Code		binary or gray
SSI clock rate		50 kHz ... 2 MHz
Data refresh rate	ST resolution ≤ 14 bit	< 1 μs
	ST resolution ≥ 15 bit	4 μs
Monoflop time		≤ 15 μs
Note: if clock starts cycling within monoflop time a second data transfer starts with the same data. If clock starts cycling after monoflop time, the data transfer starts with updated values. The update rate depends on clock speed, data length and monoflop time.		

BiSS interface		
Output driver		RS485 transceiver type
Permissible load / channel		max. +/- 20 mA
Signal level	HIGH	typ 3.8 V
	LOW at I _{Load} = 20 mA	typ 1.3 V
Resolution		10 ... 14 bit and 17 bit
Code		binary
Clock rate		up to 10 MHz
Max. update rate		< 10 μs, depends on the clock rate and the data length
Data refresh rate	ST resolution ≤ 14 bit	≤ 1 μs
	ST resolution 17 bit	2.4 μs
Note: – bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings – CRC data verification		

Status output		
Output driver		open collector, internal pull-up resistor 22 kOhm
Permissible load		max. 20 mA
Signal level	HIGH	+V
	LOW	< 1 V
Active at		LOW
The status output serves to display various alarm or error messages. The status output is HIGH (open collector with internal pull-up 22 kOhm) in normal operation.		

SET input		
Input		HIGH active
Input type		comparator
Signal level (+V = power supply)	HIGH	min. 60% of +V max. +V
	LOW	max. 25% of +V
Input current		< 0.5 mA
Min. pulse duration (SET)		10 ms
Timeout after SET signal		14 ms
The encoder can be set to zero at any position by means of a HIGH signal on the SET input. Other preset values can be factory-programmed. The SET input has a signal delay time of approximately 1 ms. Once the SET function has been triggered, the encoder requires an internal processing time of approximately 15 ms before the new position data can be read. If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.		

DIR input	
Direction input: A HIGH signal switches the direction of rotation from the default cw to ccw. This inverted function can also be factory-programmed. If DIR is reversed when the device is already switched on, this will be interpreted as an error. The status output switches to LOW. If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.	
Response time (DIR input)	1 ms

Power-ON	
After Power-ON the device requires a time of approx. 150 ms before valid data can be read.	
Hot plugging of the encoder should be avoided.	

Absolute encoders - singleturn

**Standard, ATEX/IECEX – zone 1/21
optical**

Sendix 7053 / 7073 (shaft / hollow shaft)

SSI / BiSS

Terminal assignment

Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)											
2	1, 2, A, B	SET, DIR	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	Stat	⊥	⊥
			Cable marking:	1	2	3	4	5	6	7	8	9	YE/GN	shield

+V: Encoder power supply +V DC
 0 V: Encoder power supply ground GND (0 V)
 C+, C-: Clock signal
 D+, D-: Data signal
 SET: Set input


DIR: Direction input
 Stat: Status output
 ⊥: Protective earth

Dimensions shaft version

Dimensions in mm [inch]

**Clamping / synchronous flange, ø 70 [2.76]
 Shaft type 1 with axial cable outlet**


- 1 9 x M4, 10 [0.39] deep
- 2 Keyway for DIN 6885-A-4x4x25 key

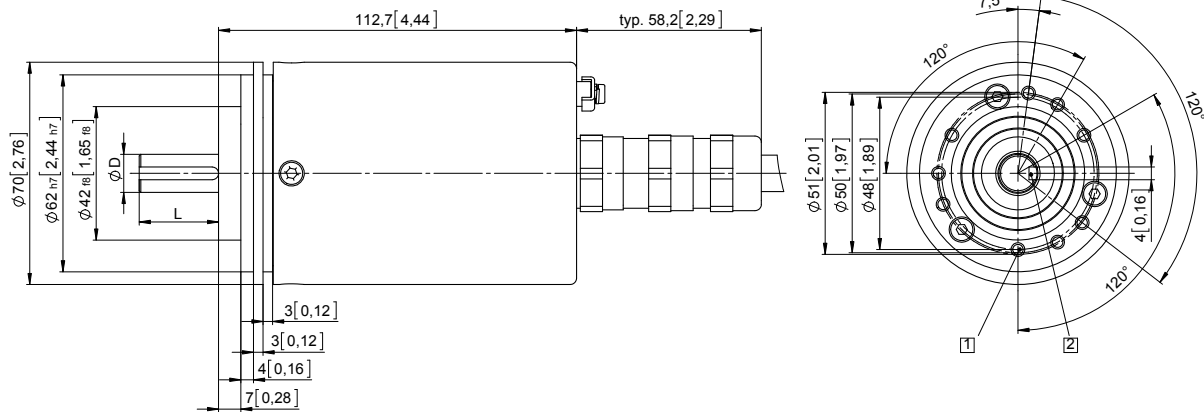

D	Fit	L
12 [0.47]	g6	25 [0.98]

**Clamping / synchronous flange, ø 70 [2.76]
 Shaft type 2 with radial cable outlet**

- 1 9 x M4, 10 [0.39] deep

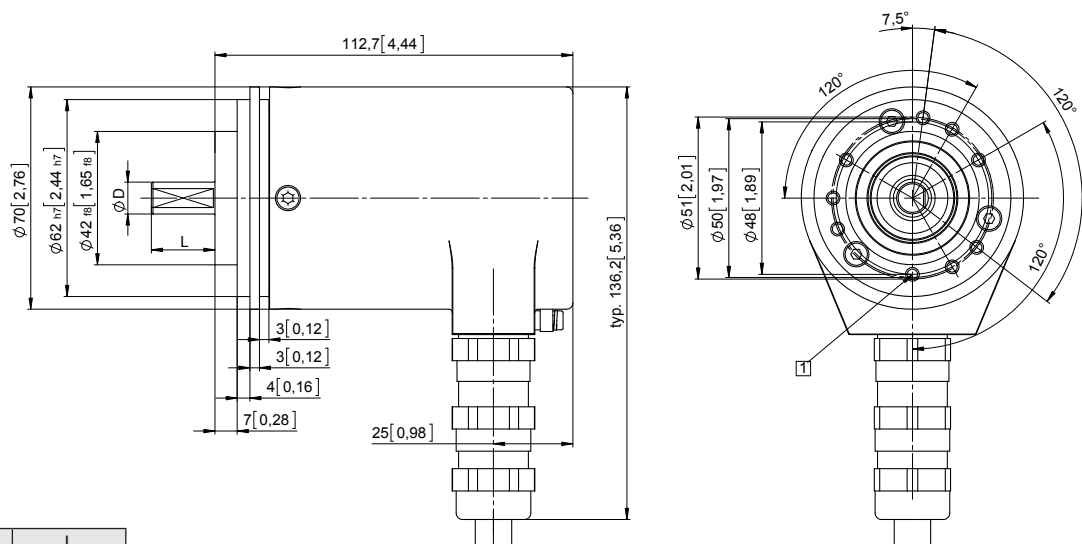

D	Fit	L
10 [0.39]	f7	20 [0.79]

**Standard, ATEX/IECEx – zone 1/21
optical**

Sendix 7053 / 7073 (shaft / hollow shaft)



SSI / BiSS

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, short Flange type 1

- 1 9 x M4, 10 [0.39] deep
- 2 Slot spring element, recommendation: cylindrical pin DIN 7, $\varnothing$ 4 [0.16]
- 3 Recommended torque for the clamping ring 2.5 Nm

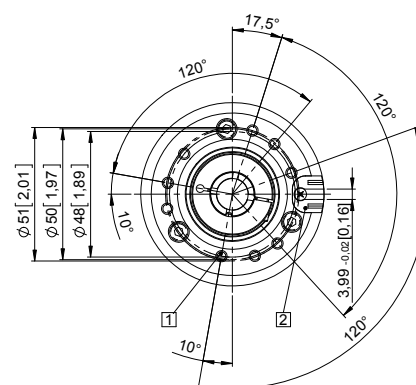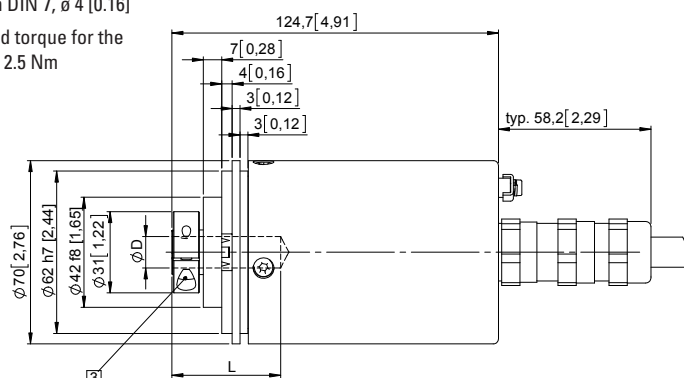

D	Fit	L
12 [0.47]	H7	41.5 [1.63"]
14 [0.55]	H7	41.5 [1.63"]



L = insertion depth max. blind hollow shaft

L = insertion depth max. blind hollow shaft

Flange with stator coupling, ø 65 [2.56]

Flange type 5

- 1** Recommended torque for the clamping ring 2.5 Nm

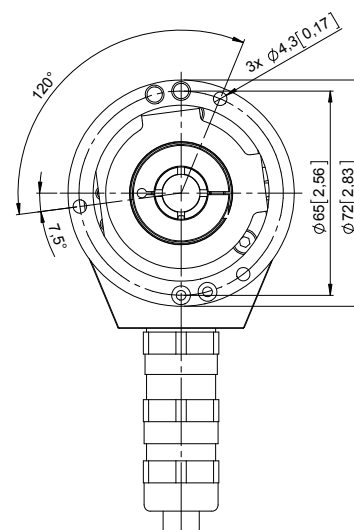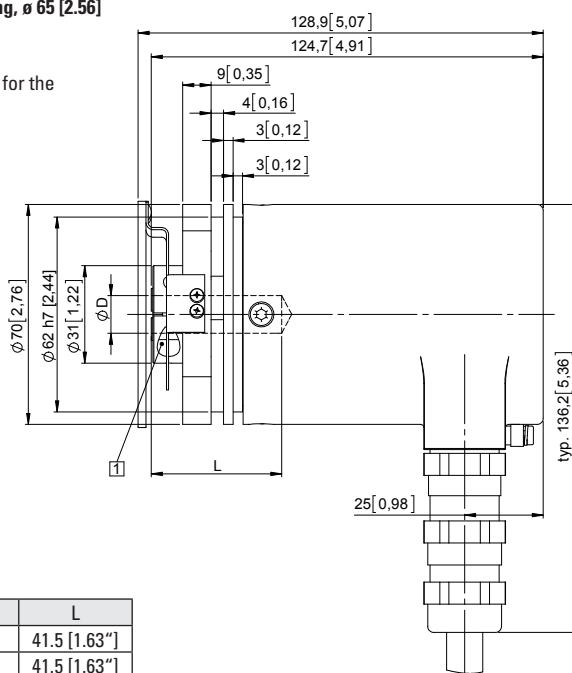

D	Fit	L
12 [0.47]	H7	41.5 [1.63"]
14 [0.55]	H7	41.5 [1.63"]

L = insertion depth max. blind hollow shaft

L = insertion depth max. blind hollow shaft