


Absolute encoders – multiturn

**Standard
electronic multiturn, optical**

Sendix F5868 / F5888 (shaft / hollow shaft)

CANopen

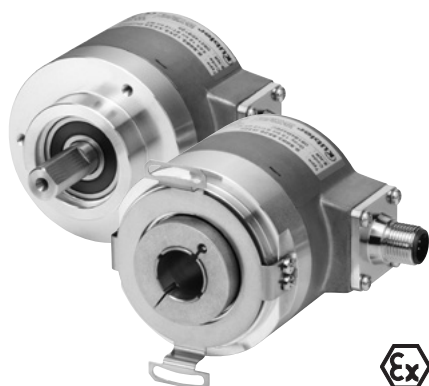

The Sendix F58 multiturn with patented Intelligent Scan Technology™ is a particularly high resolution optical multiturn encoder without gears and with 100 percent magnetic insensitivity.

32 bits total resolution, through hollow shaft up to 15 mm and CANopen functionalities according to up-to-date encoder profile.



CANopen




Multiturn resolution



Safety-Lock™



High rotational speed



Temperature range



High protection level



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Reverse polarity protection



Intelligent Scan Technology™



Surface protection salt spray-tested optional

Reliable and insensitive

- Sturdy bearing construction in Safety-Lock™ design for resistance against vibration and installation errors.
- Ideal for use outdoors thanks to IP67 protection and wide temperature range from -40°C up to +80°C.
- Patented Intelligent Scan Technology™ with all singleturn and multiturn functions on one single OptoASIC - offering the highest reliability, a high resolution up to 32 bits and 100% magnetic field insensitivity.

Up-to-the-minute Fieldbus performance

- CANopen with current encoder profile.
- LSS services for configuration of the node address and baud rate.
- Variable PDO mapping in the memory.
- Universal scaling function.
- 32 bits total resolution (16 bit MT + 16 bit ST).

**Order code
Shaft version**

8.F5868
Type

. XX 2 X . 21 2 X
a b c d e f

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.
Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

- 1 = clamping flange, IP65 ø 58 mm [2.28"]**
3 = clamping flange, IP67 ø 58 mm [2.28"]
2 = synchro flange, IP65 ø 58 mm [2.28"]
4 = synchro flange, IP67 ø 58 mm [2.28"]

b Shaft (ø x L), with flat

- 1 = 6 x 10 mm [0.24 x 0.39"]¹⁾**
2 = 10 x 20 mm [0.39 x 0.79"]²⁾
3 = 1/4" x 7/8"
4 = 3/8" x 7/8"

c Interface / power supply

- 2 = CANopen DS301 V4.02 / 10 ... 30 V DC**

d Type of connection

- A = radial cable, 2 m [6.56'] PVC
B = radial cable, special length PVC *)
E = 1 x radial M12 connector, 5-pin
F = 2 x radial M12 connector, 5-pin

*) Available special lengths (connection type B):
3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.F5868.122B.2123.0030 (for cable length 3 m)

e Fieldbus profile

- 21 = CANopen**

f Options (service)

- 2 = no option
3 = SET button

Optional on request

- Ex 2/22³⁾
- surface protection salt spray tested

1) Preferred type only in conjunction with flange type 2.
2) Preferred type only in conjunction with flange type 1.

3) For the cable connection type, cable material PUR.

Absolute encoders – multiturn

Standard electronic multiturn, optical	Sendix F5868 / F5888 (shaft / hollow shaft)	CANopen
---	---	---------

Order code	8.F5888	XX2X	212X	
Hollow shaft	Type	a b c d	e f	
If for each parameter of an encoder the <u>underlined preferred option</u> is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days. 10 by 10				
a Flange 1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] <u>5 = with stator coupling, IP65 ø 63 mm [2.48"]</u> 6 = with stator coupling, IP67 ø 63 mm [2.48"] b Through hollow shaft 3 = ø 10 mm [0.39"] <u>4 = ø 12 mm [0.47"]</u> 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] <i>Blind hollow shaft</i> <i>(insertion depth max. 30 mm [1.18"])</i> B = ø 12 mm ¹⁾ c Interface / power supply <u>2 = CANopen DS301 V4.02 / 10 ... 30 V DC</u> d Type of connection L = tangential cable, 2 m [6.56'] PVC M = tangential cable, special length PVC *) <u>E = 1 x radial M12 connector, 5-pin</u> F = 2 x radial M12 connector, 5-pin ²⁾ e Fieldbus profile <u>21 = CANopen</u> f Options (service) 2 = no option <u>3 = SET button</u> <i>Optional on request</i> - Ex 2/22 ³⁾ (not for type of connection L, M) - surface protection salt spray tested *) Available special lengths (connection type M): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.F5888.542M.2123.0030 (for cable length 3 m)				

Mounting accessory for shaft encoders		Order no.
Coupling	bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"]	8.0000.1102.0606
	bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	8.0000.1102.1010
Mounting accessory for hollow shaft encoders		Order no.
Cylindrical pin, long	with fixing thread	8.0010.4700.0000
for flange with spring element (flange type 1 + 2)		
Connection technology		Order no.
Cordset, pre-assembled	M12 female connector with coupling nut for bus in, 5-pin 2 m [6.56'] PVC cable	05.00.6091.A211.002N
	M12 male connector with external thread for bus out, 5-pin 2 m [6.56'] PVC cable	05.00.6091.A411.002N
Connector, self-assembly (straight)	M12 female connector with coupling nut for bus in, 5-pin	8.0000.5116.0000
	M12 male connector with external thread for bus out, 5-pin	8.0000.5111.0000

Absolute encoders – multiturn

Standard electronic multiturn, optical	Sendix F5868 / F5888 (shaft / hollow shaft)	CANopen
---	--	----------------

Technical data

Mechanical characteristics			Interface characteristics CANopen	
Maximum speed shaft version			Resolution singleturn	1 ... 65536 (16 bit), scalable default: 8192 (13 bit)
	IP65 up to 70°C	12000 min ⁻¹ , 10000 min ⁻¹ (continuous)	Number of revolutions (multiturn)	max. 65536 (16 bit) scalable only via the total resolution
	IP65 up to T _{max}	8000 min ⁻¹ , 5000 min ⁻¹ (continuous)	Total resolution	1 ... 4.294.967.296 (32 bit) default: 25 bit
	IP67 up to 70°C	11000 min ⁻¹ , 9000 min ⁻¹ (continuous)	Code	binary
	IP67 up to T _{max}	8000 min ⁻¹ , 5000 min ⁻¹ (continuous)	Interface	CAN high-speed acc. to ISO 11898, Basic- and Full-CAN, CAN specification 2.0 B
Maximum speed hollow shaft version			Protocol	CANopen profile DS406 V3.2 with manufacturer-specific add-ons, LSS-service DS305 V2.0
	IP65 up to 70°C	9000 min ⁻¹ , 6000 min ⁻¹ (continuous)	Baud rate	10 ... 1000 kbit/s software configurable
	IP65 up to T _{max}	6000 min ⁻¹ , 3000 min ⁻¹ (continuous)	Node address	1 ... 127 software configurable
	IP67 up to 70°C	8000 min ⁻¹ , 4000 min ⁻¹ (continuous)	Termination switchable	software configurable
	IP67 up to T _{max}	4000 min ⁻¹ , 2000 min ⁻¹ (continuous)	LSS protocol	CIA LSS protocol DS305, global command support for node address and baud rate, selective commands via attributes of the identity object
Starting torque at 20°C [68°F]	IP65	< 0.01 Nm		
	IP67	< 0.05 Nm		
Load capacity of shaft		radial		
		axial		
Mass moment of inertia		shaft version		
		hollow shaft version		
Weight		approx. 0.45 kg [15.87 oz]		
Protection acc. to EN 60529		housing side		
		shaft side		
Working temperature range		-40°C ... +80°C [-40°F ... +176°F] ¹⁾		
Material		shaft/hollow shaft		
		flange		
		housing		
		cable		
Shock resistance acc. to EN 60068-2-27		2500 m/s ² , 6 ms		
Vibration resistance acc. to EN 60068-2-6		100 m/s ² , 55 ... 2000 Hz		
Electrical characteristics				
Power supply		10 ... 30 V DC		
Power consumption (no load)		max. 100 mA		
Reverse polarity protection of the power supply		yes		
UL approval		file 224618		
CE compliant acc. to		EMC guideline 2014/30/EU RoHS guideline 2011/65/EU		
Diagnostic LED (two-color, red/green)				
LED ON or blinking		red		
		green		
		combination red / green		

1) Cable version: -30°C ... +75°C [-22°F ... +167°F].

Absolute encoders – multiturn

Standard electronic multiturn, optical	Sendix F5868 / F5888 (shaft / hollow shaft)	CANopen
---	---	---------

General information about CANopen

The CANopen encoders support the latest CANopen communication profile according to DS301 V4.2. In addition, device specific profiles such as encoder profile DS406 V3.2 and DS305 (LSS) are available.

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode and a High Resolution Sync Protocol. Moreover, scale factors, preset values, limit switch values and many other additional parameters can be programmed via the CAN bus.

When switching the device on, all parameters, which have been saved on an EEPROM to protect them against power failure, are loaded again.

The following output values may be combined in a freely variable way as PDO (PDO mapping): **position, speed, temperature** as well as the **status of the working area**.

The encoders are available with a connector or a cable connection.

The device address and baud rate can be set/modified by means of the software.

The two-color LED located on the back indicates the operating or fault status of the CAN bus, as well as the status of the internal diagnostics.

Universal scaling function

At the end of the physical resolution of an encoder, **when scaling is active**, an error appears if the division of the physical limit (GP_U) by the programmed total resolution (TMR) does not produce an integer.

The universal scaling function remedies this problem.

CANopen Communication Profile DS301 V4.2

Among others, the following functionality is integrated. Class C2 functionality:

- NMT slave.
- Identity object.
- Error behavior object.
- Variable PDO mapping self-start programmable (power on to operational), 4 sending PDO's.
- Node address, baud rate and CANbus / programmable termination.
- Producer / consumer heartbeat.

CANopen encoder profile DS406 V3.2

The following parameters can be programmed:

- Event mode.
- 2 working areas with 2 upper and lower limits and the corresponding output states.
- Variable PDO mapping for position, speed, work area status, error message, raw data.
- Extended failure management for position sensing.
- User interface with visual display of bus and failure status.
- Customer-specific memory 16 Byte.
- Customer-specific protocol.
- Universal Scaling Function (USF).
- "Watchdog controlled" device.
- Extended diagnostic modes.

LSS layer setting services DS305 V2.0

- Global support of node-ID and baud rate
- Selective protocol via identity object (1018h)

Terminal assignment

Interface	Type of connection	Function	Cable (Bus terminal cover with terminal box)						
2	A, B, L, M	Bus IN	Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	
			Cable color:	WH	BN	YE	GN	GY	

Interface	Type of connection	Function	2 x M12 connector, 5-pin						
2	F	Bus IN	Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	
			Pin:	3	2	5	4	1	
		Bus OUT	Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	
			Pin:	3	2	5	4	1	

Interface	Type of connection	Function	1 x M12 connector, 5-pin						
2	E	Bus IN	Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	
			Pin:	3	2	5	4	1	

Absolute encoders – multiturn

Standard electronic multiturn, optical	Sendix F5868 / F5888 (shaft / hollow shaft)	CANopen
---	---	---------

Dimensions shaft version



Dimensions in mm [inch]

Synchro flange, ø 58 [2.28]

Flange type 2 and 4

(drawing with M12 connector)

- 1 3 x M4, 6 [0.24] deep

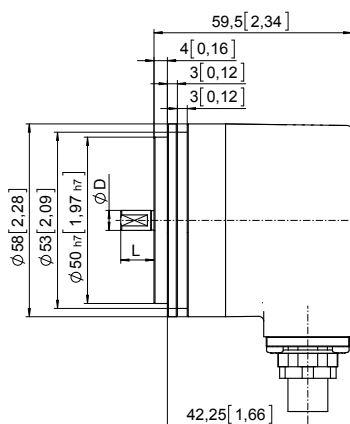

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"



Clamping flange, ø 58 [2.28]

Flange type 1 and 3

(drawing with cable)

- 1 3 x M3, 6 [0.24] deep

- 2 3 x M4, 8 [0.32] deep

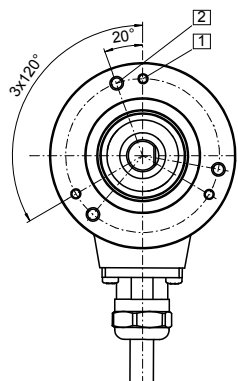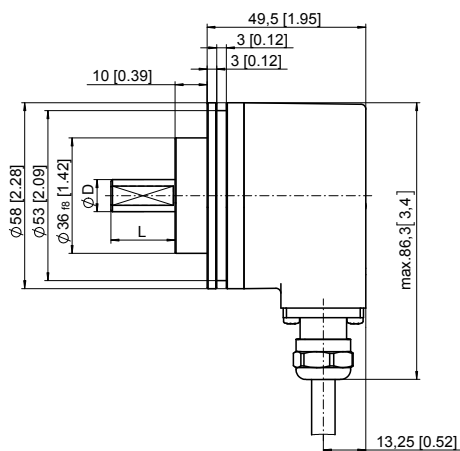

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Absolute encoders – multiturn

Standard electronic multiturn, optical

Sendix F5868 / F5888 (shaft / hollow shaft)

CANopen

Dimensions hollow shaft version



Dimensions in mm [inch]

Flange with spring element, long Flange type 1 and 2 (drawing with cable)

- 1 Slot spring element, recommendation: cylindrical pin DIN 7, $\varnothing$ 4 [0.16]
- 2 3 x M3, 6 [0.24] deep
- 3 Recommended torque for the clamping ring 0.6 Nm

D	Fit
10 [0.39]	H7
12 [0.47] *)	H7
14 [0.55]	H7
15 [0.59]	H7

*) Blind hollow shaft, insertion depth max. = 30 mm [1.18"]

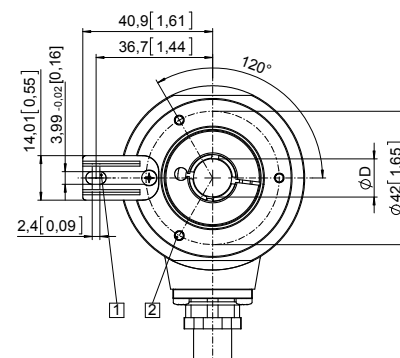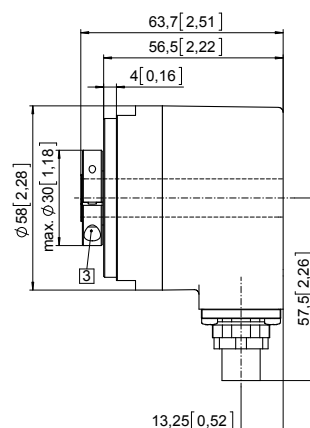



Flange with stator coupling, $\varnothing$ 63 [2.48] Flange type 5 and 6

Pitch circle diameter for fixing screws 63 [2.48]
(drawing with tangential cable)

- 1 Recommended torque for the clamping ring 0.6 Nm

D	Fit
10 [0.39]	H7
12 [0.47] *)	H7
14 [0.55]	H7
15 [0.59]	H7

*) Blind hollow shaft, insertion depth max. = 30 mm [1.18"]

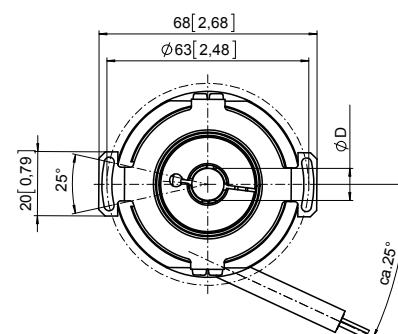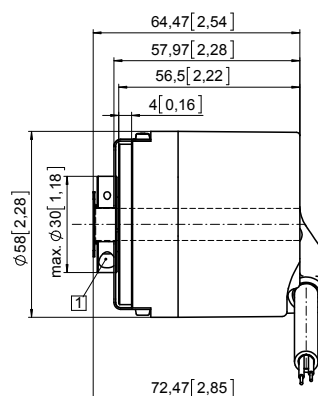

Flange with stator coupling, $\varnothing$ 63 [2.48] Flange type 5 and 6

Pitch circle diameter for fixing screws 63 [2.48]
(drawing with 2 x M12 connector)

- 1 Recommended torque for the clamping ring 0.6 Nm

D	Fit
10 [0.39]	H7
12 [0.47] *)	H7
14 [0.55]	H7
15 [0.59]	H7

*) Blind hollow shaft, insertion depth (L) max. = 30 mm [1.18"]

