

Absolute encoders – multiturn

Standard

Motor-Line, electronic multiturn, optical

Sendix F5883M (hollow shaft)

SSI / BiSS + incremental



The optical Sendix F5883 multiturn encoder in the Motor-Line version stands out particularly because of its reduced overall depth of only 43 mm with a through hollow shaft up to 15 mm.

This opens up new possibilities when dimensioning the motors and for installation in tight mounting spaces. Its technical features make the F5883 Motor-Line the ideal device for use in geared motors.




24 bit MT
Multiturn resolution



Safety-Lock™



High rotational speed



Temperature range
-40°...+85°C



High protection level
IP65



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Reverse polarity protection



Intelligent Scan Technology™



Surface protection salt spray-tested optional

Compact and robust

- Suitable for restricted mounting spaces thanks to its small construction depth of 43 mm and its tangential cable outlet.
- Sturdy bearing construction in Safety-Lock™ design for resistance against vibration and installation errors.
- Patented Intelligent Scan Technology™ with all singleturn and multiturn functions on one single OptoASIC - offering the highest reliability, a high resolution up to 41 bits and 100 % magnetic field insensitivity.

Versatile

- Through hollow shaft up to max. 15 mm and clamping both on the flange and on the cover side – suitable for usual drive shafts for geared motors, flexible installation.
- Available with SSI or BiSS interface and combined with SinCos incremental signals.
- SET button and LED for simple start-up.
- High resolution feedback in real-time via incremental outputs SinCos and RS422.
- Short control cycles, clock frequency with SSI up to 2 MHz / with BiSS up to 10 MHz.

Absolute encoders
multiturn

Order code Hollow shaft

8.F5883M
Type

XXXX . XXXX
a b c d e f g h

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.
Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.

10 by 10

a Flange

1 = with spring element, long, IP65

5 = with stator coupling, IP65, ø 63 mm [2.48"]

9 = with torque stop, flexible, IP65

b Through hollow shaft

Clamping on the flange side

3 = ø 10 mm [0.39"]

4 = ø 12 mm [0.47"]

5 = ø 14 mm [0.55"]

6 = ø 15 mm [0.59"]

9 = ø 1/2"

Clamping on the cover side

A = ø 12 mm [0.39"]

B = ø 14 mm [0.55"]

C = ø 15 mm [0.59"]

c Interface / power supply

1 = SSI, BiSS / 5 V DC

2 = SSI, BiSS / 10 ... 30 V DC

3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC

4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC

5 = SSI, BiSS / 5 V DC, with sensor output

6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output

7 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC

8 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC

A = SSI, BiSS + 1024 ppr. RS422 (TTL-comp.) / 5 V DC

B = SSI, BiSS + 1024 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC

d Type of connection

E = tangential cable, 1 m PVC

F = tangential cable, special length PVC *)

*) Available special lengths (connection type F):

2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21"]

order code expansion .XXXX = length in dm

ex.: 8.F5883M.542F.G323.0030 (for cable length 3 m)

e Code

B = SSI, binary

C = BiSS, binary

G = SSI, gray

f Resolution (singleturn) ¹⁾

A = 10 bit

1 = 11 bit

2 = 12 bit

3 = 13 bit

4 = 14 bit

7 = 17 bit

g Resolution (multiturn) ¹⁾

2 = 12 bit MT

6 = 16 bit MT

4 = 24 bit MT

h Options (service)

1 = no option

2 = status LED

3 = SET button and status LED

Optional on request

- surface protection salt spray tested

- other singleturn resolutions

1) Resolution, preset value and counting direction factory-programmable.

Absolute encoders – multiturn

Standard Motor-Line, electronic multiturn, optical	Sendix F5883M (hollow shaft)	SSI / BiSS + incremental
---	-------------------------------------	---------------------------------

Mounting accessory for hollow shaft encoders	Dimensions in mm [inch]	Order no.
Cylindrical pin, long for flange with spring element (flange type 1)	with fixing thread 	8.0010.4700.0000

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Suitable connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Mechanical characteristics		
Maximum speed		9000 min ⁻¹ , 6000 min ⁻¹ (continuous)
Starting torque at 20°C [68°F]		< 0.01 Nm
Mass moment of inertia		6.0 x 10 ⁻⁶ kgm ²
Load capacity of shaft	radial axial	80 N 40 N
Weight		approx. 0.45 kg [15.87 oz]
Protection		IP65
Working temperature range		-40°C ... +85°C [-40°F ... +185°F] ¹⁾
Material	hollow shaft flange housing cable	stainless steel aluminum zinc die-cast PVC
Shock resistance acc. to EN 60068-2-27		2500 m/s ² , 6 ms
Vibration resistance acc. to EN 60068-2-6		100 m/s ² , 55 ... 2000 Hz

Electrical characteristics		
Power supply		5 V DC (+5%) or 10 ... 30 V DC
Current consumption (no load)	5 V DC 10 ... 30 V DC	max. 60 mA max. 30 mA
Reverse polarity protection of the power supply		yes (at 10 ... 30 V DC)
Short circuit proof outputs		yes ²⁾
UL approval		file 224618
CE compliant acc. to		EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

SSI interface		
Output driver		RS485 transceiver type
Permissible load / channel		max. +/- 30 mA
Signal level	HIGH LOW at I _{Load} = 20 mA	typ 3.8 V typ 1.3 V
Resolution singleturn		10 ... 17 bit
Number of revolutions (multiturn)		max. 24 bit
Code		binary or gray
SSI clock rate		50 kHz ... 2 MHz
Data refresh rate	ST resolution ≤ 14 bit ST resolution ≥ 15 bit	≤ 1 μs 4 μs
Monoflop time		≤ 15 μs
Note: If the clock starts cycling within the monoflop time, a second data transfer starts with the same data. If the clock starts cycling after the monoflop time, the data transfer starts with the new values. The update rate is dependent on the clock speed, data length and monoflop-time.		

BiSS interface		
Output driver		RS485 transceiver type
Permissible load / channel		max. +/- 30 mA
Signal level	HIGH LOW at I _{Load} = 20 mA	typ 3.8 V typ 1.3 V
Resolution singleturn		10 ... 17 bit
Number of revolutions (multiturn)		max. 24 bit
Code		binary
BiSS clock rate		50 kHz ... 10 MHz
Max. update rate		< 10 μs, depends on the clock rate and the data length
Data refresh rate	ST resolution ≤ 14 bit ST resolution 17 bit	≤ 1 μs 2.4 μs
Note:	– bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings – CRC data verification	

Status output and LED		
Output driver		open collector, internal pull up resistor 22 kΩhm
Permissible load		max. 20 mA
Signal level		HIGH: +V / LOW: < 1 V
Active		LOW
The optional LED (red) and the status output serve to display various alarm or error messages. In normal operation the LED is OFF and the status output is HIGH (open collector with int. pull up 22 kΩhm).		
An active status output (LOW) displays:		
– sensor error, singleturn or multiturn (soiling, glass breakage etc.) – LED fault (failure or ageing) – over- or under-temperature		
In the SSI mode, the fault indication can only be reset by switching off the power-supply to the device.		

Incremental outputs (A/B)		
	SinCos	RS422 TTL compatible
Max. frequency -3dB	400 kHz	400 kHz
Signal level	1 V _{pp} (±20 %)	HIGH: min. 2.5 V LOW: max. 0.5 V
Short circuit proof	yes ²⁾	yes ²⁾
Pulse rate	1024 / 2048 ppr	1024 / 2048 ppr

1) Temperature measured on the flange – max. 80°C allowable on the cable (fixed installation).
2) Short circuit to 0 V or to output; if power supply correctly applied.

Absolute encoders – multiturn

Standard Motor-Line, electronic multiturn, optical	Sendix F5883M (hollow shaft)	SSI / BiSS + incremental
---	-------------------------------------	---------------------------------

SET input			
Input	active HIGH		
Input type	comparator		
Signal level (+V = power supply)	HIGH LOW	min. 60 % of +V, max: +V max. 30 % of +V	
Input current	< 0.5 mA		
Min. pulse duration (SET)	10 ms		
Input Delay	1 ms		
New position data readable after	1 ms		
Internal processing time	200 ms		
The encoder can be set to zero at any position by means of a HIGH signal on the SET input or by pressing the optional SET button (with a pencil, ball-point pen or similar). Other preset values can be factory-programmed. The SET input has a signal processing time of approx. 1 ms, after which the new position data can be read via SSI or BiSS. Once the SET function has been triggered, the encoder requires an internal processing time of typ. 200 ms; during this time the power supply must not be switched off. The SET function should be carried out whilst the encoder is at rest. If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.			

DIR input	
Direction input: A HIGH signal switches the direction of rotation from the default cw to ccw. This inverted function can also be factory-programmed. If DIR is changed when the device is already switched on, then this will be interpreted as an error. The status output will switch to LOW. If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.	
Response time (DIR input)	1 ms

Power-ON	
After Power-ON the device requires a time of approx. 150 ms before valid data can be read. Hot plugging of the encoder should be avoided.	

Terminal assignment

Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)													
1, 2	E, F	SET, DIR, Status	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	Stat	N/C	N/C	N/C	⊥
			Cable color:	WH	BN	GN	YE	GY	PK	BU	RD	BK	-	-	-	shield
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)													
5	E, F	SET, DIR, Status sensor output	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	Stat	N/C	0Vsens	+Vsens	⊥
			Cable color:	WH	BN	GN	YE	GY	PK	BU	RD	BK	-	GY-PK	RD-BU	shield
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)													
3, 4, 7, 8, A, B	E F	SET, DIR, SinCos or incr. RS422	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	A	$\bar{A}$	B	$\bar{B}$	⊥
			Cable color:	WH	BN	GN	YE	GY	PK	BU	RD	BK	VT	GY-PK	RD-BU	shield
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)													
6	E, F	SinCos or incr. RS422 sensor output	Signal:	0 V	+V	C+	C-	D+	D-	A	$\bar{A}$	B	$\bar{B}$	0Vsens	+Vsens	⊥
			Cable color:	WH	BN	GN	YE	GY	PK	BU	RD	BK	VT	GY-PK	RD-BU	shield

- +V: Encoder power supply +V DC
0 V: Encoder power supply ground GND (0 V)
0 Vsens / +Vsens: Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.
C+, C-: Clock signal
D+, D-: Data signal
A, $\bar{A}$: Incremental output channel A (cosine)
B, $\bar{B}$: Incremental output channel B (sine)
SET: Set input
DIR: Direction input
Stat: Status output
PH ⊥: Plug connector housing (shield)

Absolute encoders – multiturn

Standard

Motor-Line, electronic multiturn, optical

Sendix F5883M (hollow shaft)




SSI / BiSS + incremental

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, long Flange type 1

- 1 Slot spring element, recommendation: cylindrical pin DIN 7, $\varnothing 4$ [0.16]
- 2 3 x M3, 6 [0.24] deep
- 3 Recommended torque for the clamping ring 0.6 Nm
- 4 Status-LED
- 5 SET button

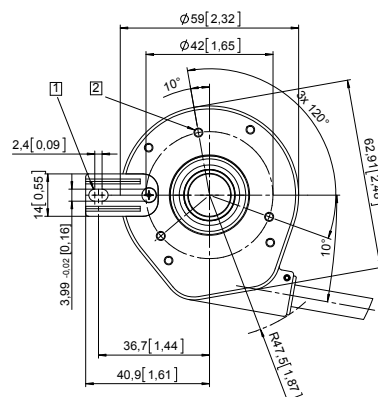




D	Fit
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/2 "	H7

Flange with stator coupling, $\varnothing 63$ [2.48]

Flange type 5

Pitch circle diameter for fixing screws 63 mm [2.48]

- 1 Recommended torque for the clamping ring 0.6 Nm
- 2 Status-LED
- 3 SET button

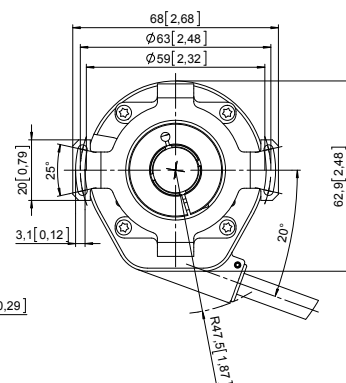
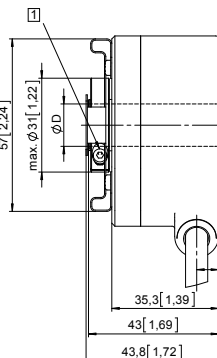



D	Fit
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/2 "	H7

Flange with torque stop, flexible

Flange type 9

- 1 Recommended torque for the clamping ring 0.6 Nm
- 2 Status-LED
- 3 SET button

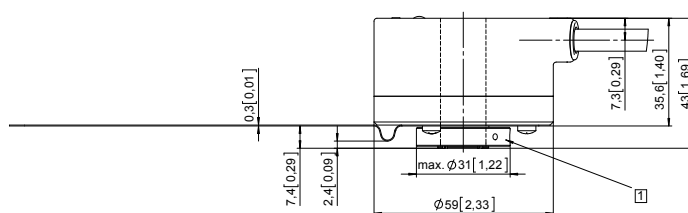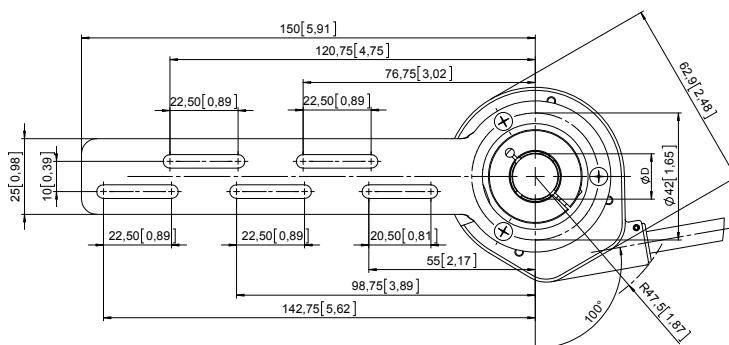

D	Fit
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/2 "	H7