

Absolute Encoders – Multiturn

Compact, optical	Sendix F3668 / F3688 (Shaft / Hollow shaft)	CANopen
------------------	---	---------



The Sendix F36 multiturn with the patented Intelligent Scan Technology™ is an optical multiturn encoder in miniature format, without gears and with 100% insensitivity to magnetic fields. With a size of just 36 x 42 mm it offers a shaft or a blind hollow shaft of up to 10 mm.




Recipients of the MessTec & Sensor Master Award and the Golden Mousetrap Award.



Safety-Lock™



High rotational speed



Temperature



High protection level



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Short-circuit proof



Reverse polarity protection



Optical sensor



Seawater-resistant version on request

Reliable and magnetically insensitive

- Sturdy bearing construction in Safety Lock™ Design for resistance against vibration and installation errors
- Reduced number of components ensures magnetic insensitivity
- Ideal for use outdoors thanks to IP67 protection and wide temperature range from -40°C up to +85°C
- Patented Intelligent Scan Technology™ with all singleturn and multiturn functions on one single OptoAsic - offering highest reliability, a high resolution up to 41 bits and 100% magnetic field insensitivity

Up-to-the-minute Fieldbus performance

- CANopen with current encoder profile
- LSS services for configuration of the node address and baud rate
- Variable PDO mapping in the memory

Order code Shaft version

8.F3668 . XX2X . 21 12
Type a b c d e

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



- a** Flange, ø 36 mm
1 = clamping flange, IP67
2 = synchro flange, IP67
3 = clamping flange, IP65
4 = synchro flange, IP65

- b** Shaft (ø x L), with flat
1 = ø 6 x 12,5 mm
2 = ø 6,35 (1/4") x 12,5 mm
3 = ø 8 x 15 mm
4 = ø 9,5 x 15,875 mm (3/8" x 5/8")
5 = ø 10 x 20 mm

- c** Interface / Power supply
2 = CANopen DS301 V4.02 / 10 ... 30 V DC
d Type of connection
1 = cable, tangential (1 m PUR)
3 = cable, tangential (5 m PUR)

optional on request
- Ex 2/22
- seawater-resistant
- special cable length

- e** Fieldbus profile
21 = CANopen Encoder profile DS406 V3.2

Order code Hollow shaft

8.F3688 . XX2X . 21 12
Type a b c d e

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



- a** Flange, ø 36 mm, IP65
1 = with torque stop, short
2 = with stator coupling
3 = with torque stop, long


- b** Blind hollow shaft
4 = ø 10 mm
5 = ø 6 mm
6 = ø 6.35 mm (1/4")
7 = ø 8 mm

- c** Interface / Power supply
2 = CANopen DS301 V4.02 / 10 ... 30 V DC
d Type of connection
1 = cable, tangential (1 m PUR)
3 = cable, tangential (5 m PUR)

optional on request
- Ex 2/22
- seawater-resistant
- special cable length

- e** Fieldbus profile
21 = CANopen Encoder profile DS406 V3.2

Absolute Encoders – Multiturn

Compact, optical	Sendix F3668 / F3688 (Shaft / Hollow shaft)	CANopen
Mounting accessory for shaft encoders		
Coupling	Bellows coupling ø 19 mm for shaft 8 mm	8.0000.1101.0808
Mounting accessory for hollow shaft encoders		
Cylindrical pin, long for torque stops	 With fixing thread	8.0010.4700.0000
Connection Technology		
Connector, self-assembly (straight)	M12	8.0000.5111.0000
Programming set		
including:	- Interface converter USB-CAN - Connection cable from interface converter to encoder - Power supply 90 ... 250 V AC - DVD with Ezturn® software	8.0010.9000.0015 Minimum System Requirements: Operating system: Windows XP SP3 or higher Win7 in preparation Processor: 1 GHz RAM : 512 MB Required disk space: 500 MB

Mechanical characteristics		
Maximum speed		
Shaft- or blind hollow shaft version without shaft seal (IP65)		12 000 min ⁻¹ 10 000 min ⁻¹ (continuous op.)
Shaft version (IP67) or hollow shaft version (IP65) with shaft seal		10 000 min ⁻¹ 8 000 min ⁻¹ (continuous op.)
Starting torque	without shaft seal with shaft seal (IP67)	< 0.007 Nm < 0.01 Nm
Shaft load capacity	radial axial	40 N 20 N
Weight		ca. 0.2 kg
Protection to EN 60529	housing side shaft side	IP 67 IP 65 (solid shaft version opt. IP67)
EX approval for hazardous areas		optional Zone 2 and 22
Working temperature range		-40°C ... +85°C
Materials	shaft / hollow shaft flange housing cable	stainless steel aluminium zinc die-cast PUR
Shock resistance acc. to EN 60068-2-27		2500 m/s ² , 6 ms
Vibration resistance acc. to EN 60068-2-6		100 m/s ² , 55 ... 2000 Hz

Diagnostic LED (two-colour, red/green)		
LED ON or blinking	red	Error display
	green	Status display

General electrical characteristics	
Supply voltage	10 ... 30 V DC
Current consumption (no load)	max. 80 mA
Reverse polarity protection of the power supply (U _B)	yes
UL approval	File 224618
RoHS compliant acc. to	EU guideline 2002/95/EG
CE compliant acc. to	EN 61000-6-2, EN 61000-6-4, and EN 61000-6-3

Interface characteristics CANopen	
Resolution Singleturn	1 ... 65536 (16 bit), scaleable:: 1 ... 65536
Default value Singleturn	8192 (13 bit)
Total resolution	1 ... 4.294.967.296 (32 bit) Default: 25 bit
Code	Binary
Interface	CAN High-Speed according to ISO 11898, Basic- and Full-CAN, CAN Specification 2.0 B
Protocol	CANopen profile DS406 V3.2 with manufacturer-specific add-ons LSS-Service DS305 V2.0
Baud rate	10 ... 1000 kbit/s (Software configurable)
Node address	1 ... 127 (Software configurable)
Termination switchable	Software configurable
LSS Protocol	CIA LSS protocol DS305 Global command support for node address and baud rate. Selective commands via attributes of the identity object

Absolute Encoders – Multiturn

Compact, optical

Sendix F3668 / F3688 (Shaft / Hollow shaft)

CANopen

General information about CANopen

The CANopen encoders support the latest CANopen communication profile according to DS301 V4.02 . In addition, device-specific profiles like the encoder profile DS406 V3.2 are available.

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode. Moreover, scale factors, preset values, limit switch values and many other additional parameters can be programmed via the CAN-Bus. When switching the device on, all parameters, which have been saved on a flash memory to protect them against power failure, are loaded again.

The following output values may be combined in a freely variable way as PDO (PDO mapping): position, speed as well as the status of the working area.

The encoders are available with a connector or a cable connection. The device address and baud rate can be set/modified by means of the software. The two-colour LED located on the back indicates the operating or fault status of the CAN bus, as well as the status of the internal diagnostics. CANopen Communication Profile DS301 V4.02 Among others, the following functionality is integrated. Class C2 functionality:

NMT Slave

- Heartbeat Protocol
- Identity Object
- Error Behaviour Object
- Variable PDO Mapping self-start programmable (Power on to operational), 3 Sending PDO's
- Node address, baud rate and CANbus / Programmable termination

CANopen Encoder Profile DS406 V3.2

The following parameters can be programmed:

- Event mode
- 1 work area with upper and lower limit and the corresponding output states
- Variable PDO mapping for position, speed, work area status
- Extended failure management for position sensing
- User interface with visual display of bus and failure status 1 LED two colours
- Customer-specific memory - 16 Bytes
- Customer-specific protocol

"Watchdog controlled" device

LSS Layer Setting Services DS305 V2.0

- Global support of Node-ID and baud rate
- Selective protocol via identity object (1018h)

CAN bus connection

The CANopen encoders are equipped with a Bus trunk line in various lengths and can be terminated in the device.

The devices do not have an integrated T-coupler nor they are looped internally and must therefore only be used as end devices.

If possible, drop lines should be avoided, as in principle they lead to signal reflections. As a rule the reflections caused by the drop lines are not critical, if they have completely decayed before the point in time when the scanning occurs.

The sum of all the drop lines should not, for a particular baud rate, exceed the maximum length L_u .

L_u < 5 m cable length for 125 Kbit

L_u < 2 m cable length for 250 Kbit

L_u < 1 m cable length for 1 Mbit

When used as a drop line, the termination resistor should not be activated.

For a network with 3 encoders and 250 Kbit the maximum length of the drop line/ encoder must not exceed 70 cm.

Terminal assignment


Interface	Type of connection	Features	Cable					
2	1, 3	CANopen	Signal:	+V	0 V	CAN GND	CAN High	CAN Low
			Cable colour:	BN	WH	GY	GN	YE

Absolute Encoders – Multiturn


Compact, optical	Sendix F3668 / F3688 (Shaft / Hollow shaft)	CANopen
-------------------------	--	----------------

Dimensions shaft version:


Synchro flange, ø 36 mm

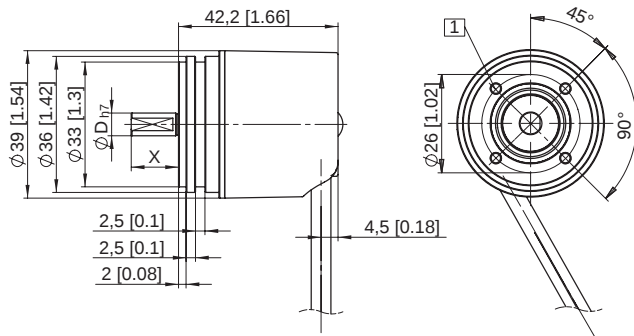

Clamping flange, ø 36 mm

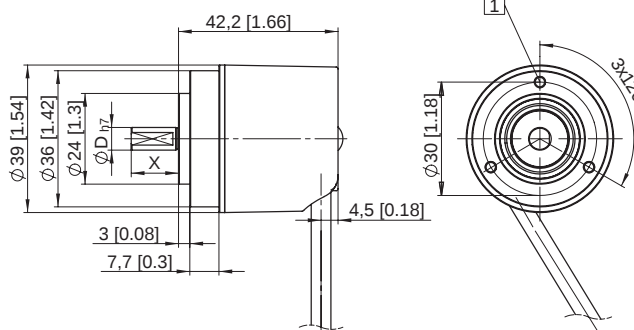

- 1 M3, 6 [0.24] deep
- 2 Battery (in the cable)

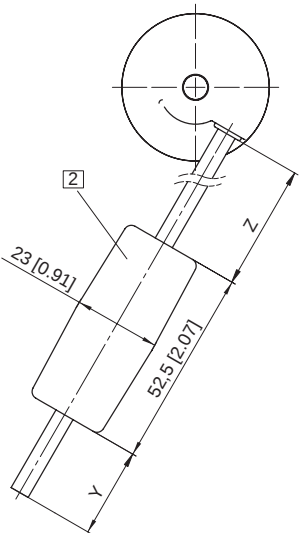


Y	Z
1 m	150 mm
5 m	150 mm


Dimensions hollow shaft version:

With torque stop, short, ø 36 mm

(Long torque stop version is shown dashed)

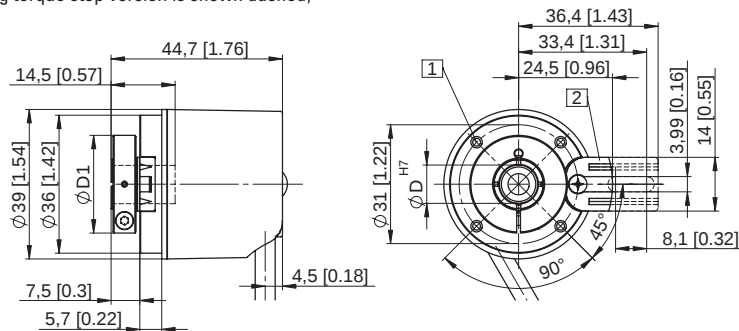


- 1 M2.5. 5 [0.2] deep
- 2 Torque stop slot
Recommendation:
cylindrical pin DIN 7, ø 4 mm
- 3 Battery (in the cable)

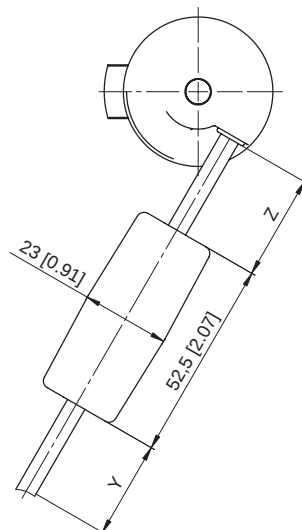

Hollow shaft acc. to order code	D1
1	ø 24 mm
2	ø 24 mm
3	ø 25.5 mm
4	ø 25.5 mm

With stator coupling, ø 36 mm

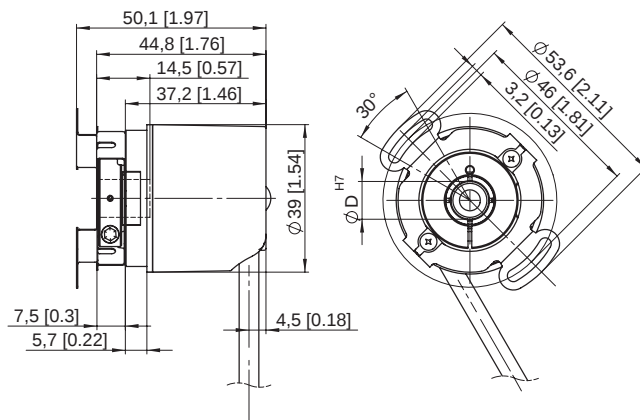

- 1 M2.5. 5 [0.2] deep
- 2 Torque stop slot
Recommendation:
cylindrical pin DIN 7, ø 4 mm
- 3 Battery (in the cable)

Y	Z
1 m	150 mm
5 m	150 mm

Insertion depth for blind hollow shaft 14,5 mm