

Incremental encoders

Miniature magnetic	2430 / 2440 (shaft / hollow shaft)	RS422
--------------------	------------------------------------	-------



Thanks to their non-contact magnetic scanning technology the miniature-format encoders 2430 and 2440 guarantee exceptional ruggedness – and this with a resolution of up to 256 pulses per revolution.

As a result of their compact outer diameter of only 24 mm, they are ideal for use where installation space is restricted.



Incremental encoders



Magnetically robust

- The non-contact magnetic technology prevents wear and guarantees a long service life.
- Multiple clamping affords high strain relief to the cable outlet, ensuring longer life.
- Wide temperature range from -20°C up to +85°C.
- Flexible connection possibilities: can be supplied with radial or axial cable outlet.

Compact power

- Resolution up to 256 pulses per revolution.
- Shaft and hollow shaft version.

Order code

Shaft version

8.2430

Type

. XX6X . XXXX

a Flange

- 1 = $\varnothing$ 24 mm [0.94"]
- 3 = $\varnothing$ 28 mm [1.10"]
- 2 = $\varnothing$ 30 mm [1.18"]

b Shaft ($\varnothing \times L$)

- 1 = $\varnothing$ 4 x 10 mm [0.16 x 0.39"]
- 3 = $\varnothing$ 5 x 10 mm [0.20 x 0.39"], with flat
- 2 = $\varnothing$ 6 x 10 mm [0.24 x 0.39"]

c Output circuit / power supply

- 6 = RS422 (with inverted signal) / 5 V DC

d Type of connection

- 1 = axial cable, 2 m [5.56'] PVC
- A = axial cable, special length PVC *)
- 2 = radial cable, 2 m [5.56'] PVC
- B = radial cable, special length PVC *)

*) Available special lengths (connection types A, B):
3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.2430.126A.0256.0030 (for cable length 3 m)

e Pulse rate

- 1 ... 128 (factory programmable)
- 256
- (e.g. 128 pulses => 0128)

Optional on request
- other pulse rates

Order code

Hollow shaft

8.2440

Type

. 1X6X . XXXX

a Flange

- 1 = $\varnothing$ 24 mm [0.94"]

b Blind hollow shaft

(insertion depth max. 14 mm [0.55"])

- 1 = $\varnothing$ 4 mm [0.16"]
- 2 = $\varnothing$ 6 mm [0.24"]

c Output circuit / power supply

- 6 = RS422 (with inverted signal) / 5 V DC

d Type of connection

- 1 = axial cable, 2 m [5.56'] PVC
- A = axial cable, special length PVC *)
- 2 = radial cable, 2 m [5.56'] PVC
- B = radial cable, special length PVC *)

*) Available special lengths (connection types A, B):
3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.2440.126A.0256.0030 (for cable length 3 m)

e Pulse rate

- 1 ... 128 (factory programmable)
- 256
- (e.g. 128 pulses => 0128)

Optional on request
- other pulse rates

Incremental encoders

Miniature magnetic	2430 / 2440 (shaft / hollow shaft)	RS422
---------------------------	---	--------------

Mounting accessory for shaft encoders	Order no.
Coupling	bellows coupling ø 15 mm [0.59"] for shaft 4 mm [0.16"]
	8.0000.1202.0404

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Mechanical characteristics		Electrical characteristics	
Maximum speed	12000 min ⁻¹	Output circuit	RS422 (TTL compatible)
Mass moment of inertia	approx. 0.1 x 10 ⁻⁶ kgm ²	Power supply	5 V DC (±5 %)
Starting torque - at 20°C [68°F]	< 0.01 Nm	Power consumption with inverted signal (no load)	typ. 40 mA max. 90 mA
Shaft load capacity	radial 10 N axial 20 N	Permissible load / channel	max. +/- 20 mA
Weight	approx. 0.06 kg [2.11 oz]	Pulse frequency	max. 300 kHz
Protection acc. to EN 60529	housing side IP65 (IP67 on request) flange side IP50 (IP67 on request)	Signal level	HIGH min. 2.5 V LOW max. 0.5 V
Working temperature range	-20°C ... +85°C [-4°F ... +185°F]	Rising edge time t_r	max. 200 ns
Materials	shaft / hollow shaft stainless steel clamping flange MS58	Falling edge time t_f	max. 200 ns
Shock resistance acc. to EN 60068-2-27	1000 m/s ² , 6 ms	Min. pulse edge interval	0.5 µs ¹⁾
Vibration resistance acc. to EN 60068-2-6	100 m/s ² , 55 ... 2000 Hz	Short circuit proof outputs²⁾	yes ³⁾
		Reverse polarity protection of the power supply	no
		CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

Terminal assignment

Output circuit	Type of connection	Cable (isolate unused wires individually before initial start-up)								
6 with inv. signal	1, 2, A, B	Signal:	0 V	+V	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$
		Core color:	WH	BN	GN	YE	GY	PK	BU	RD

+V: Encoder power supply +V DC
0 V: Encoder power supply ground GND (0 V)
A, $\bar{A}$: Incremental output channel A
B, $\bar{B}$: Incremental output channel B
0, $\bar{0}$: Reference signal

1) For max. speed use a counter with input frequency of min. 500 kHz.
2) If power supply correctly applied.
3) Only one channel allowed to be shorted-out:
If +V = 5 V DC short circuit to channel, 0 V, or +V is permitted.

Miniature magnetic

2430 / 2440 (shaft / hollow shaft)

RS422


Dimensions shaft version

Dimensions in mm [inch]

Flange type 1, ø 24 [0.94]

- 1 min R50 [1.97]
2 3 x M3, 4 [0.16] deep

D	Fit	L
4 [0.16]	f7	10 [0.39]
5 [0.20]	f7	10 [0.39]
6 [0.24]	f7	10 [0.39]

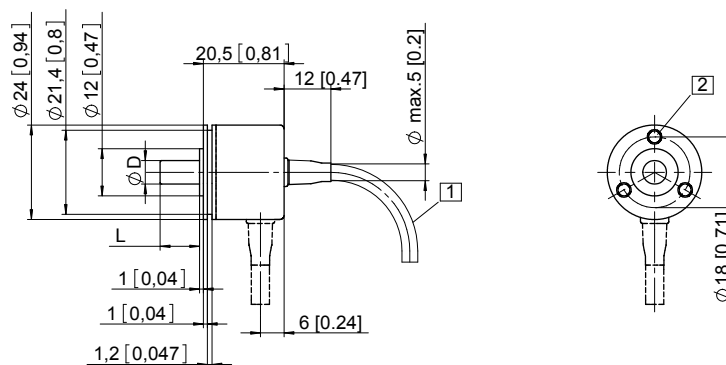


Flange type 2, ø 30 [1.18]

Flange type 3, ø 28 [1.10]

- 1 min R50 [1.97]
2 2 x M3, 4 [0.16] deep

D	Fit	L
4 [0.16]	f7	10 [0.39]
5 [0.20]	f7	10 [0.39]
6 [0.24]	f7	10 [0.39]

Flange type	A	B
2	ø 30 [1.18]	3 [0.12]
3	ø 28 [1.10]	2 [0.08]

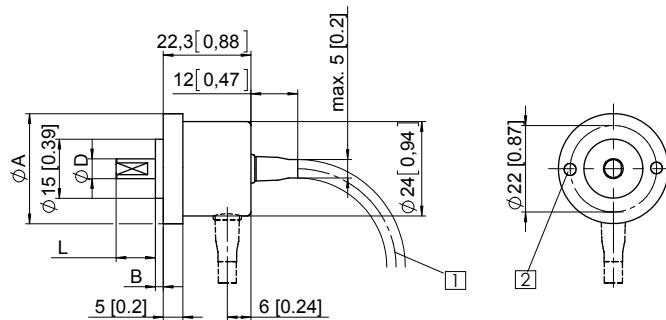

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange type 1, ø 24 [0.94]

- 1 4 x M3 DIN 915 - SW1.5

D	Fit	L
4 [0.16]	H7	14 [0.55]
6 [0.24]	H7	14 [0.55]
1/4"	H7	14 [0.55]

L = insertion depth max. blind hollow shaft

L = insertion depth max. blind hollow shaft

