

Incremental encoders

Standard, ATEX/IECEX – mining optical	Sendix 7100 / 7120 (shaft / hollow shaft)	Push-pull / RS422
--	--	--------------------------



The incremental encoders Sendix 7100 / 7120 in a compact 70 mm stainless steel housing have an ATEX/IECEX mining approval.

These shock and vibration resistant encoders operate flexibly with a resolution of up to 5000 pulses per revolution; they are also available with axial and radial cable outlets.



Incremental encoders

Ex approval	Safety-Lock™	High rotational speed	High protection level	High shaft load capacity	Shock / vibration resistant	Magnetic field proof	Short-circuit proof	Reverse polarity protection	Optical sensor

Compact and safe

- Can be used even when space is tight.
- Minimal installation depth, diameter 70 mm.
- Compact cable outlet axial or radial.
- Remains sealed even in harsh everyday use and ensures highest safety against field breakdowns (IP67 protection).

Explosion protection

- Mining approval.
- "Flame-proof enclosure" construction.
- ATEX with EC type examination certificate.
- IECEx with certificate of conformity (CoC).

Order code	8.7100	. 2XXXX . XXXX . XXXX
Shaft version	Type	a b c d e f

a Flange 2 = clamping / synchronous flange, IP67, ø 70 mm [2.76"]	d Type of connection 1 = axial cable, 2 m [6.56'] PUR 2 = radial cable, 2 m [6.56'] PUR A = axial cable, length > 2 m [6.56'] B = radial cable, length > 2 m [6.56']	f Cable length in dm ¹⁾ 0050 = 5 m [16.40'] 0100 = 10 m [32.81'] 0150 = 15 m [49.21']
b Shaft (ø x L) 2 = 10 x 20 mm [0.39 x 0.79"], with flat 1 = 12 x 25 mm [0.47 x 0.98"], with keyway for 4 x 4 mm [0.16 x 0.16"] key	e Pulse rate 1, 5, 10, 12, 36, 50, 100, 200, 250, 256, 300, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)	Optional on request - other pulse rates - special cable length
c Output circuit / power supply 4 = RS422 (with inverted signal) / 5 V DC 1 = RS422 (with inverted signal) / 5 ... 30 V DC 2 = push-pull (7272 compatible with inverted signal) / 5 ... 30 V DC 5 = push-pull (with inverted signal) / 10 ... 30 V DC		

1) Not applicable with connection types 1 and 2.

Incremental encoders

Standard, ATEX/IECEX – mining optical	Sendix 7100 / 7120 (shaft / hollow shaft)	Push-pull / RS422
--	--	--------------------------

Order code	8.7120	.XXXXX.XXXX.XXXX	
Hollow shaft	Type	a b c d e f	
a Flange 2 = with spring element, short 6 = with stator coupling, IP67, ø 65 mm [2.56"] b Blind hollow shaft (insertion depth max. 41.5 mm [1.63"]) 1 = ø 12 mm [0.47"] 2 = ø 14 mm [0.55"] c Output circuit / power supply 4 = RS422 (with inverted signal) / 5 V DC 1 = RS422 (with inverted signal) / 5 ... 30 V DC 2 = push-pull (7272 compatible with inverted signal) / 5 ... 30 V DC 5 = push-pull (with inverted signal) / 10 ... 30 V DC d Type of connection 1 = axial cable, 2 m [6.56'] PUR 2 = radial cable, 2 m [6.56'] PUR A = axial cable, length > 2 m [6.56'] B = radial cable, length > 2 m [6.56'] e Pulse rate 1, 5, 10, 12, 36, 50, 100, 200, 250, 256, 300, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100) f Cable length in dm ¹⁾ 0050 = 5 m [16.40'] 0100 = 10 m [32.81'] 0150 = 15 m [49.21'] <i>Optional on request</i> - other pulse rates - special cable length			

Technical data

Explosion protection 7100		Explosion protection 7120	
ATEX		ATEX	
EC type-examination certificate	IBExU 14 ATEX 1047 X	EU type-examination certificate	IBExU 15 ATEX 1057 X
Category	Ex I M2 Ex d I/IIC T4 - T6 Mb	Category	Ex I M2 Ex db I/IIC T4/120°C (T4)/T6 Mb
Relevant standards	EN 60079-0:2012; ATEX guideline 94/9/EC	Relevant standards	EN 60079-0:2012 + A11:2013; ATEX guideline 2014/34/EU
IECEX		IECEX	
Certificate of Conformity (CoC)	IECEX IBE 14.0023 X	Certificate of Conformity (CoC)	IECEX IBE 15.0019 X
Category	Ex d I/IIC T4 - T6 Mb	Category	Ex db I/IIC T4/120°C (T4)/T6 Mb
Relevant standards	IEC 60079-0:2011; IEC 60079-1:2007	Relevant standards	IEC 60079-0:2011; IEC 60079-1:2014

Mechanical characteristics		EMC	
Maximum speed	shaft 6000 min ⁻¹ (continuous) hollow shaft 3000 min ⁻¹ (continuous)	Relevant standards	EN 55011 class B:2009 / A1:2010 EN 61000-6-2:2005 / AC:2005 EN 61000-6-3:2007 / A1:2011 EN 61326-1:2013
Starting torque – at 20°C [68°F]	< 0.05 Nm		
Mass moment of inertia	4.0 x 10 ⁻⁶ kgm ²		
Load capacity of shaft	radial 80 N axial 40 N		
Weight	approx. 2.8 kg [98.77 oz]		
Protection acc. to EN 60529	IP67		
Ambient temperature	-40°C ... +60°C [-40 ... +140°F] Please note the specifications for temperature class in EC type-examination certificate!		
Materials	shaft stainless steel flange / housing stainless steel cable PUR		
Shock resistance	acc. to EN/IEC 60068-2-27 1000 m/s ² , 6 ms		
Vibration resistance	acc. to EN/IEC 60068-2-6 100 m/s ² , 55 ... 2000 Hz		

1) Not applicable with connection types 1 and 2.

Incremental encoders

Standard, ATEX/IECEx – mining optical	Sendix 7100 / 7120 (shaft / hollow shaft)	Push-pull / RS422
---------------------------------------	---	-------------------

Electrical characteristics				
Output circuit	RS422 (TTL compatible) Order code 1	RS422 (TTL compatible) 4	Push-pull 5	Push-pull (7272 compatible) 2
Power supply	5 ... 30 V DC	5 V DC ($\pm 5\%$)	10 ... 30 V DC	5 ... 30 V DC
Power consumption (no load)	typ. 40 mA max. 90 mA	typ. 40 mA max. 90 mA	typ. 50 mA max. 100 mA	typ. 50 mA max. 100 mA
Permissible load / channel	max. ± 20 mA	max. ± 20 mA	max. ± 20 mA	max. ± 20 mA
Pulse frequency	max. 300 kHz	max. 300 kHz	max. 300 kHz	max. 300 kHz ¹⁾
Signal level	HIGH min. 2.5 V LOW max. 0.5 V	min. 2.5 V max. 0.5 V	min +V - 1.0 V max. 0.5 V	min. +V - 2.0 V max. 0.5 V
Rising edge time t_r	max. 200 ns	max. 200 ns	max. 1 μ s	max. 1 μ s
Falling edge time t_f	max. 200 ns	max. 200 ns	max. 1 μ s	max. 1 μ s
Short circuit proof outputs ²⁾	yes ³⁾	yes ³⁾	yes	yes
Reverse polarity protection of the power supply	yes	no	yes	no
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU			

Terminal assignment

Output circuit	Type of connection	Cable (isolate unused wires individually before initial start-up)												
1, 2, 4, 5	1, 2, A, B	Signal:	0 V	+V	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$	0 V _{sens}	+V _{sens}	$\perp$	
		Core marking:	1	2	3	4	5	6	7	8	9	10	shield	

- +V: Encoder power supply +V DC
0 V: Encoder power supply ground GND (0 V)
0 V_{sens} / +V_{sens}: Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.
A, $\bar{A}$: Incremental output channel A
B, $\bar{B}$: Incremental output channel B
0, $\bar{0}$: Reference signal
 $\perp$: Plug connector housing (shield)

1) Max. recommended cable length 30 m [98.43'].
2) Short-circuit with 0 V or output, only one channel at a time, power supply correctly applied.
3) Only one channel allowed to be shorted-out:
at +V= 5 V DC, short-circuit to channel, 0 V, or +V is permitted.
at +V= 5 ... 30 V DC, short-circuit to channel or 0 V is permitted.

Incremental encoders

**Standard, ATEX/IECEx – mining
optical**

Sendix 7100 / 7120 (shaft / hollow shaft)


Push-pull / RS422

Dimensions shaft version

Dimensions in mm [inch]

Clamping / synchronous flange, $\varnothing$ 70 [2.76]
Shaft type 1 with axial cable outlet


- 1 9 x M4, 10 [0.39] deep
- 2 Keyway for DIN 6885-A-4x4x25 key

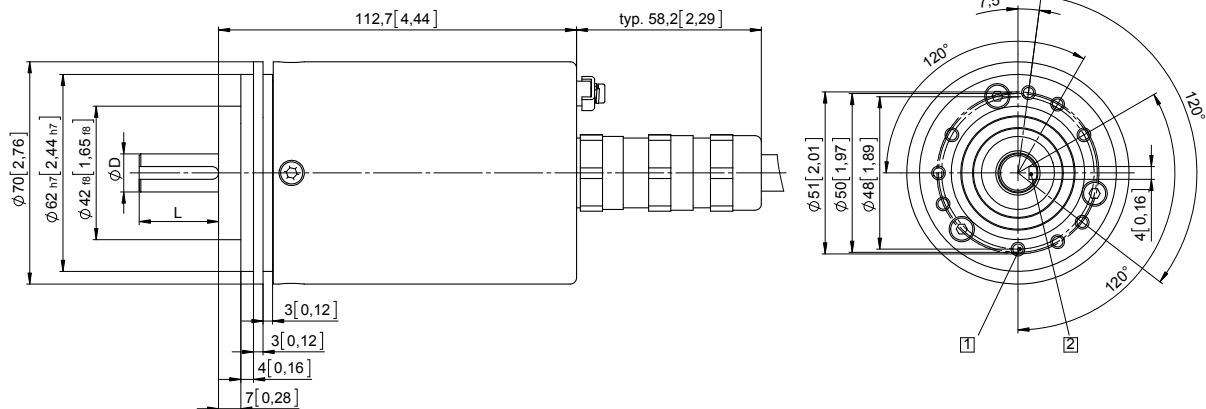

D	Fit	L
12 [0.47]	g6	25 [0.98]

Clamping / synchronous flange, $\varnothing$ 70 [2.76]
Shaft type 2 with radial cable outlet

- 1 9 x M4, 10 [0.39] deep

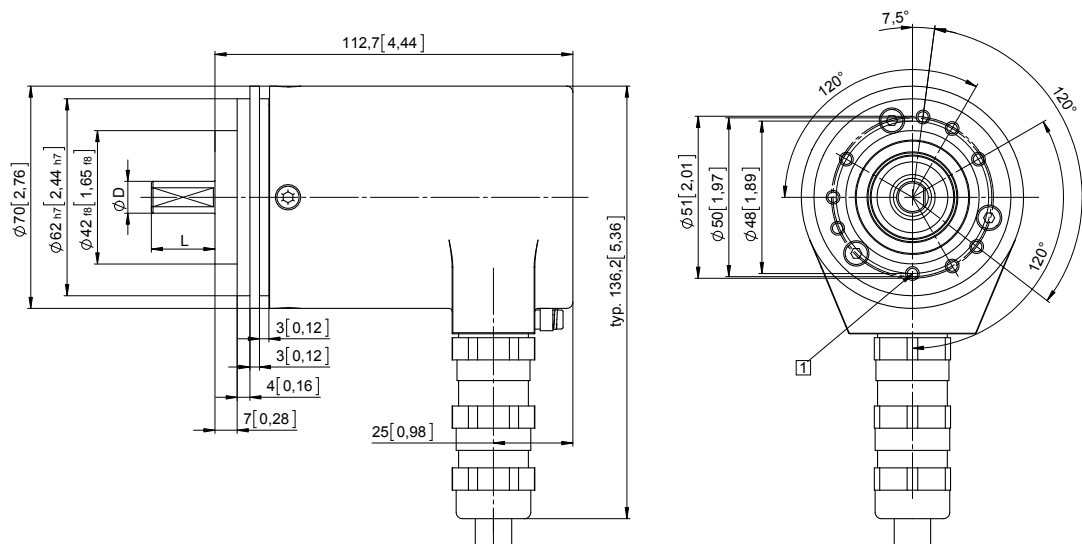

D	Fit	L
10 [0.39]	f7	20 [0.79]

Incremental encoders

**Standard, ATEX/IECEx – mining
optical**

Sendix 7100 / 7120 (shaft / hollow shaft)



Push-pull / RS422

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, short Flange type 2

- 1 9 x M4, 10 [0.39] deep
- 2 Slot spring element,
recommendation:
cylindrical pin DIN 7, $\varnothing$ 4 [0.16]
- 3 Recommended torque for the
clamping ring 2.5 Nm

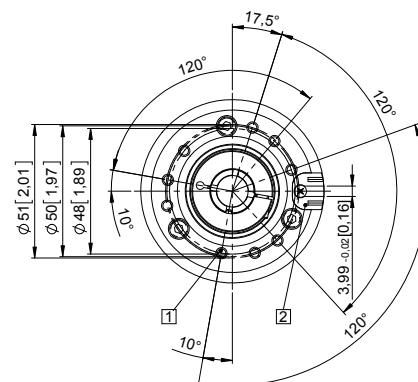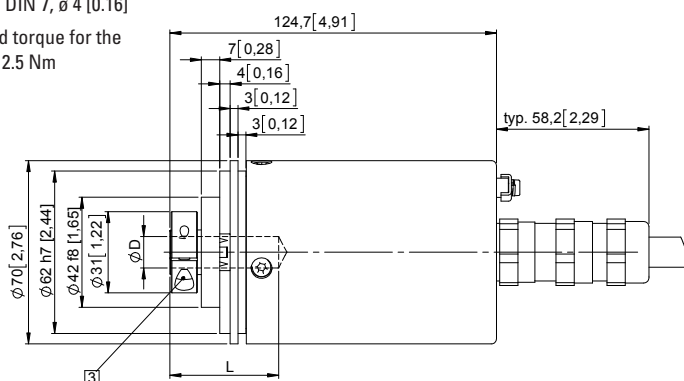



D	Fit	L
12 [0.47]	H7	41.5 [1.63"]
14 [0.55]	H7	41.5 [1.63"]

L = insertion depth max. blind hollow shaft

Flange with stator coupling, $\varnothing$ 65 [2.56]

Flange type 6

- 1 Recommended torque for the
clamping ring 2.5 Nm

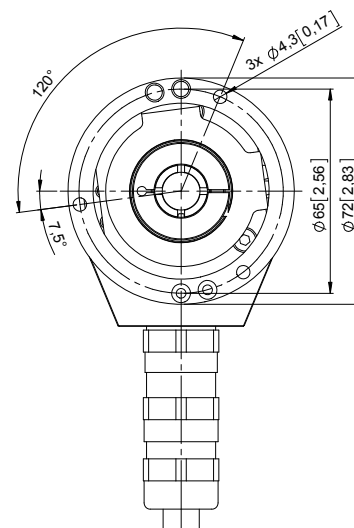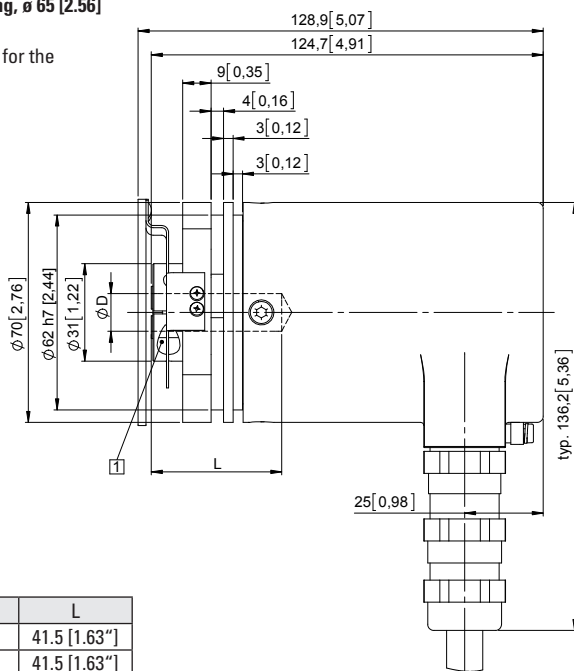

D	Fit	L
12 [0.47]	H7	41.5 [1.63"]
14 [0.55]	H7	41.5 [1.63"]

L = insertion depth max. blind hollow shaft