

Type series SH 17

- 7 digit hour meter for DIN rail mounting with snap-on mechanism according to EN 50022
- 36 mm [1.418"] wide, Count range 99999,99 h

Versatile

- AC and DC versions
- Wide temperature range

Applications:

Switch cabinets, distribution panels etc.



Accurate

- Quartz-controlled (DC version)
50 Hz for AC


Easy

- easy to mount on 35 mm DIN rail
- easy to connect thanks to screw terminals

Technical data:

Electrical connection:	Screw terminal	Ambient temperature:	–10° ... +70 °C [14 °F ... 158 °F] at AC –10° ... +50 °C [14 °F ... 122 °F] at DC
Power consumption:	DC: approx. 1 W AC: approx. 2.5 VA	Mounting position:	any
Rated voltages:	230 V AC ±10 %, 50 Hz 10 ... 27 V DC	Protection:	IP 65 (front) screw terminal IP 20
On time:	100 %	Housing:	Plastic; colour Ral 7035
Display:	7 figures (99999,99 h)	Weight:	approx. 60 g [2.116 oz]
Count mode:	adding	Colour of housing:	grey
Height of figures:	1.5 x 3.5 mm [0.059 x 0.138"]		
Colour of figures:	white on black decimal figures black on white		
Reset:	no		

Dimensions:

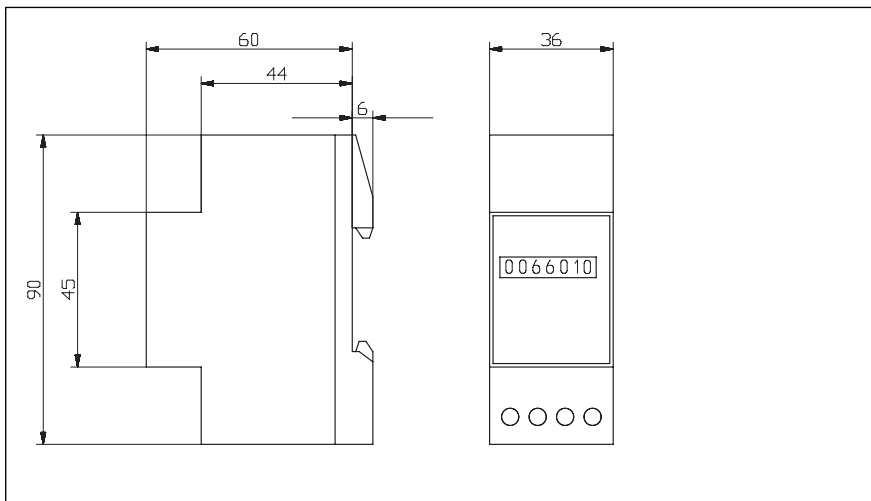

Connection

- DC: 2 = +
3 = –
- AC: 2 and 3

Order information:

Voltage	10 ... 27 V DC	230 V AC
Art. No.	0.170.000.351	0.170.000.075