

CT

Voice Synthesizer



ADPCM64kbit/s



95dB/m

16sec

2 channels

IP53


NPN
Open collector

Compact Voice Synthesizer designed for vehicle-mount and outdoor applications.

- Audible message adjustable up to 95dB (at 1m) with volume control.
- Sound Pattern: 2 messages in 16 sec. and custom made messages available.

* Continuous contact closure replays selected channel repeatedly.

Dimensions

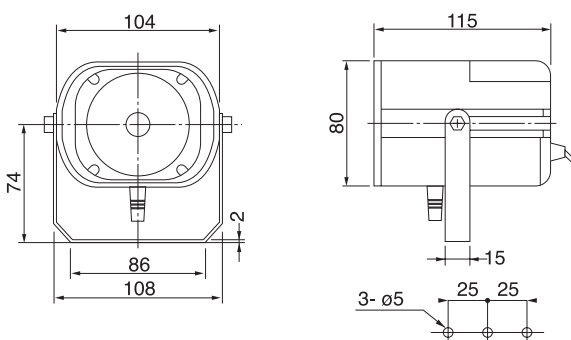

(mm)

CT type

Model	Rated Voltage	Voltage Range	Power Consumption	Volume	Outer Contact Capacity
CT-201	DC 12~24V	DC 10~30V	6W	Max. 95dB at 1m	More than 5mA
Operating Temperature Range		Auxiliary Input	Channel	Max Message Time	Protection
-20°C~+60°C		Voltage contact	2	16sec.	IP53
Humidity 85% or less.		Voltage free contact			Mass
					0.7kg