

KJ / KJB

Cube Tower

Bulb



85dB/m

Electronic Sound 1

□ 116

IP23




Light-weight Cube Tower featuring built-in buzzers suitable for various indoor applications.

- Integral Rotating Parabolic Reflector: For enhanced visibility from a distance.
- Flashing Cycle: 130 times/min.
- Built-in Alarm: Adjustable intermittent buzzer volume up to 85dB (at 1m).
- Installation: Upright only.
- Main Body: Impact- and heat-resistant ABS resin.
- Lens: Superior weather-resistant and light-translucent AS resin.
- Spare Bulb: Included.
- Available Colors: Red, Amber, Green, Blue.

Available Special Order


- CE Compliance

Dimensions

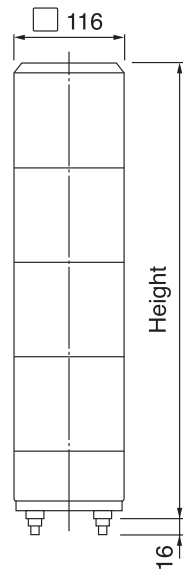

Height (mm)
1 Light:185
2 Lights:290
3 Lights:395
4 Lights:500


Mounting Dimension

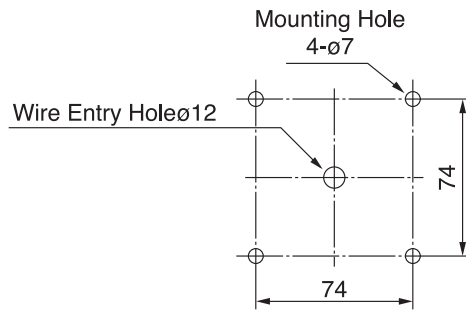


(mm)

Wiring Diagram

KJ/KJB(24V DC)

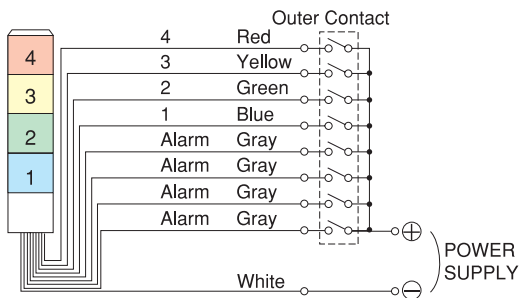

KJ/KJB(100V AC, 220V AC)

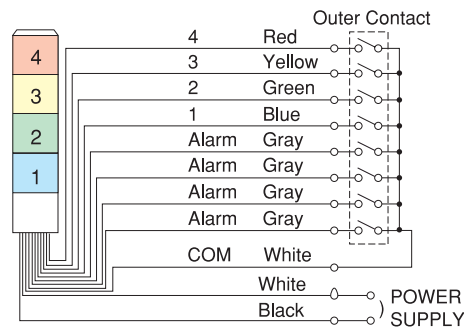

※ KJ-110/120 are voltage contact type. (There are no Alarm signal wires.)
※ KJ does not have gray wire.

Current of signal wire and contact capacity per stack

Voltage Type	Signal wire Current	Rush Current	Outer Contact Capacity	Alarm wire Current	Alarm wire Rush Current
DC 24V	0.42A	4.6A	More than 5A	60mA	500mA
AC 100V/AC 220V					

KJ type

Number of stacks	Model	Rated Voltage	Power Consumption	Bulb	No.
1Light	-102	DC 24V	13.5W	24V 10W	10
	-110	AC 100V	6W	12V 5W	12
	-120	AC 220V	5.5W		
2Lights	-202	DC 24V	25.5W	24V 10W	10
	-210	AC 100V	11W	12V 5W	12
	-220	AC 220V	9.9W		
3Lights	-302	DC 24V	37.5W	24V 10W	10
	-310	AC 100V	16W	12V 5W	12
	-320	AC 220V	14.3W		
4Lights	-402	DC 24V	49.5W	24V 10W	10
	-410	AC 100V	21W	12V 5W	12
	-420	AC 220V	18.7W		

Bulb--G18 BA15S

FB type approx. 130 flashes per minute.

How to order

