

KJS / KJSB


Cube Tower

Bulb**Electronic
Sound 1****□ 82****IP23****NPN
Open collector**


Compact Cube Tower featuring built-in buzzer designed for application to small equipments.

- Integral Rotating Parabolic Reflector: For enhanced visibility from a distance.
- Flashing Cycle: 160 times/min.
- Built-in Alarm: Intermittent buzzer volume up to 85dB (at 1m).
- Installation: Upright only.
- Main Body: Impact- and heat-resistant ABS resin.
- Lens: Superior weather-resistant and light-translucent AS resin.
- Spare Bulb: Included.
- Available Colors: Red, Amber, Green, Blue.


Dimensions

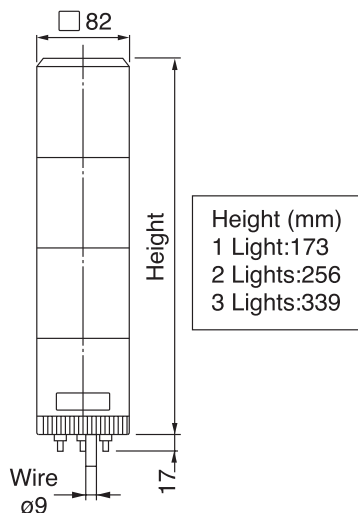

Mounting Dimension

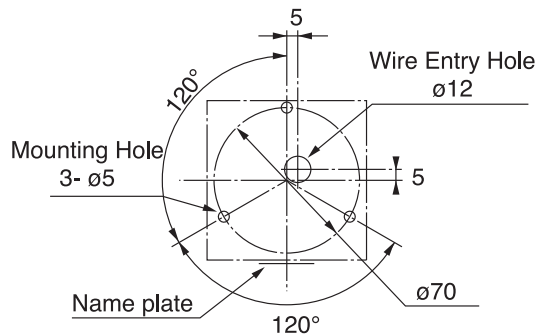

Wiring Diagram

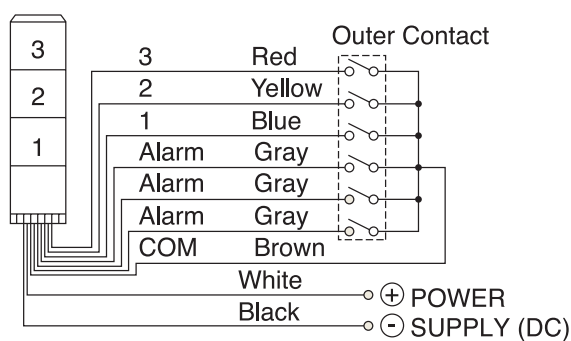

※ KJS does not have gray wire.

Open collector

NPN transistor

Red, Yellow,
Blue, Gray

COM Brown

Transistor Capacity (NPN)

Model	KJS (KJSB)
Current Capacity	$I_c \geq 50\text{mA}$ ($I_c \geq 300\text{mA}$)
Withstand Voltage	$V_c \geq 45\text{V}$

■ Current of signal wire and contact capacity per stack

Voltage Type	Lamp wire Current	Alarm wire Current	Lamp wire Contact Capacity	Alarm wire Contact Capacity
DC 12V	34mA	100mA	More than 50mA	More than 300mA
DC 24V				
AC 100V				
AC 220V				

KJS / KJSB type

Number of stacks	Model	Rated Voltage	Power Consumption	Bulb	No.
1Light	-101	DC 12V	6W	12V 5W	12
	-102	DC 24V	12W	24V 10W	10
	-110	AC 100V	8W	12V 5W	12
	-120	AC 220V			
2Lights	-201	DC 12V	11W	12V 5W	12
	-202	DC 24V	24W	24V 10W	10
	-210	AC 100V	16W	12V 5W	12
	-220	AC 220V			
3Lights	-301	DC 12V	16W	12V 5W	12
	-302	DC 24V	35W	24V 10W	10
	-310	AC 100V	23W	12V 5W	12
	-320	AC 220V			

Bulb---G18 BA15S

FB type approx. 160 flashes per minute.

How to order

