

KPE

Signal Light

LED



ø162

IP23


Drip-proof




Rust-free plastic LED Revolving Warning Light featuring adjustable flashing cycles and maintenance-free design.

- Enhanced Illumination: Special high intensity illumination design for improved light diffusion, ensuring sufficient brightness even in outdoors.
- Flashing Cycle: Adjustable flashing between 50~200 times/minute with external signal input.
- Extended Bulb life: No bulb replacement needed with long-life LED, perfect for "hard-to-service" locations.
- Installation: Indoors—upright, inverted, sideways; Outdoors—upright only.
- No Motor: No worn-out motor within electronic rotating-light system.
- Main Body: Weather-resistant special resin.
- Dome: Superior weather-resistant and light translucent acrylic resin.
- Stainless Mounting Bolts: Corrosion-proof screws, even in ocean environment.
- Available Colors: Red, Amber.

Dimensions

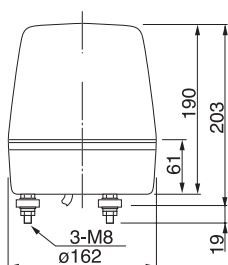

Mounting Dimension

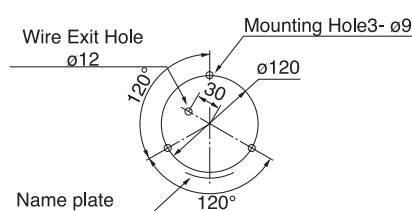

(mm)

KPE type

Model	Rated Voltage	Current	Flashes per Minute	Mass
KPE-100	AC100V	50mA/100mA	50~200 (revolution) 60 (flashes)	1.5Kg
KPE-220	AC220V	30mA/50mA		

Operating Temperature Range: -30°C ~ +60°C