



Xenon

Ø100

IP55 With SZ-210


Xenon Signal Light featuring superior night-time visibility and adjustable flashing cycle.

- Newly Developed Prism-cut Lens: For bright illumination and improved visibility from all directions.
- Extended Bulb Life: Shock resistant xenon, strong even under severe vibration.
- Installation: Upright, inverted and sideways for indoors only.
- Main Body: Impact- and heat-resistant ABS resin.
- Lens: Superior impact- and heat-resistant polycarbonate resin for superior durability and light transmission.
- Superior Visibility: Intensive flashing using a xenon lamp (night-time visibility: 1,000m+).
- Flashing Cycle: Adjustable constant flashing between 30~90 times/minute (no surging).
- IP55 with the optional Rubber gasket SZ-200A (IP23 without).
- Available Colors: Red, Amber, Green, Blue.


Available Special Order

- Silver Body.
- UL type (E215660).

Dimensions

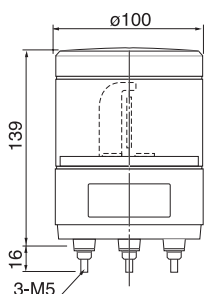

Mounting Dimension

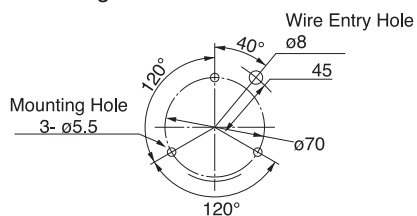

(mm)

KX type

Model	Rated Voltage	Power Consumption	Rush Current	Flashes per Minute
KX-12	DC 12V	8W	—	30~90
KX-24	DC 24V		—	
KX-100	AC 100V	4W	10A	
KX-220	AC 220V		21A	

Rush current of this product is very high. Please check the outer contact capacity.