

MV

Voice Synthesizer



85dB/m

32sec

2 channels (MV-02CT)
4 channels (MV-04CT)

□70

IP20




Compact Voice Synthesizer featuring choice of MP3 messages for in-vehicle and integrated applications*.

*(i. e. control panels, switchboards and production equipment)

- Audible messages up to 85dB (at 1m).
- MP3 64kbit/s: Clear sound quality.
- Sound Pattern: 2 or 4 messages in 32sec.
- Installation: Easy mount for indoors only.

Dimensions

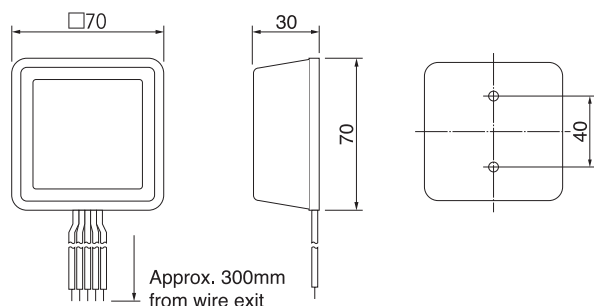

(mm)

MV type

Model	Rated Voltage	Voltage Range	Power Consumption	Volume	Outer Contact Capacity
MV-02CT	DC 12~24V	DC 10~32V	3W	Max. 85dB at 1m	More than 10mA
MV-04CT			3.2W		

Model	Operating Temperature Range	Auxiliary Input	Channel	Max Message Time	Mass
MV-02CT	-10°C~+55°C	Voltage contact / Voltage free contact	2	32sec.	0.095kg
MV-04CT	Humidity 85% or less.	Voltage free contact	4		