

RLE

Revolving Warning Light



Optional
Rubber Gasket
SZ-210



LED

ø82


IP55 With SZ-210

Drip-proof


LED Signal Lights featuring energy-saving and enhanced illumination with LED integrated reflection system.

- LED Integrated Reflection System: For enhanced illumination
- Compact Motor: Higher durability and energy-efficient..
- Energy-Efficient: Maintenance-free LED.
- Installation: Indoors—upright, inverted, sideways; Outdoors—upright only.
- Main Body: Impact- and heat-resistant ABS resin.
- Dome: Superior impact- and heat-resistant polycarbonate resin.
- Available Colors: Red, Amber, Green.

Dimensions



Mounting Dimension

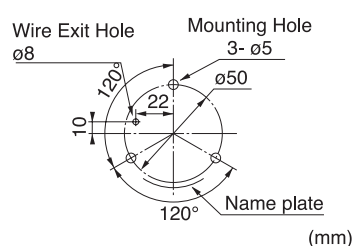

RLE type

Model	Rated Voltage	Power Consumption	Flashes per Minute	Mass
©RLE-12	DC12V	1.7W MAX	120	0.4Kg
RLE-24	DC24V	3.9W MAX		0.6Kg
RLE-100	AC100V	2W MAX		
RLE-220	AC220V	2W MAX		

©:Custom order