

SKL-A

Revolving Warning Light



Bulb



ø162


IP23




Basic Revolving Warning Light in large size with highly durable housing.

- Installation: Indoors—upright, inverted, sideways; Outdoors—upright only.
- Main Body: SKL-C ---Scratch-free melamine coating body, SKL-S ---Corrosion-proof stainless body (SUS304).
- Dome: Superior impact- and heat-resistant polycarbonate resin.
- Available Colors: Red, Amber, Green, Blue.

Dimensions



Mounting Dimension

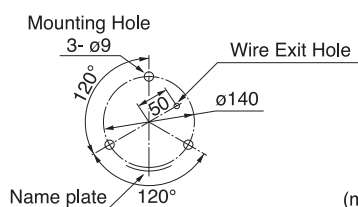

(mm)

SKL-A type

Model	Rated Voltage	Current	Flashes per Minute	Bulb	No.	Mass
SKL-101CA/101SA	DC12V	2.6A	140	12V35W	1	1.4Kg
SKL-102CA/102SA	DC24V	1.2A		24V35W	2	
◎SKL-102ACSA	AC24V					
SKL-104CA	DC48V	0.8A		48V35W	5	1.5Kg
SKL-110CA/110SA	AC100V	0.3A		120V40W	6	
SKL-120CA/120SA	AC200V	0.13A	220V30W	37		
Bulb: 12V/24V · RP35 BA15S 48V/120V/220V · RP35 BA15D						◎: Custom order

Bulb...12V/24V · RP35 BA15S 48V/120V/220V · RP35 BA15D

◎:Custom order