

SKV-A

Revolving Warning Light



Bulb




ø204

IP66


Corrosion-resistant Revolving Warning Light.

- Installation: Upright, inverted, sideways.
- Main Body: Corrosion-resistant aluminum alloy casting with pass-through metal fixture.
- Dome: Superior impact- and heat-resistant polycarbonate resin.
- Operating Temperature: -30C~80C
- Available Colors: Red, Amber.

Dimensions



Mounting Dimension

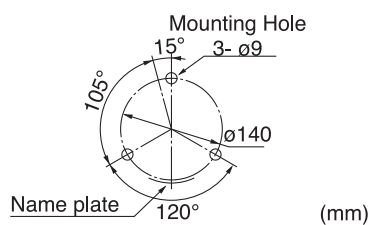

(mm)

SKV-A type

Model	Rated Voltage	Current	Flashes per Minute	Bulb	No.	Mass
◎ SKV-101A	DC12V	2.6A	140	12V35W	1	2.6Kg
◎ SKV-102A	DC24V	1.2A		24V35W	2	
SKV-110A	AC100V	0.3A	120	120V40W	6	2.8Kg
SKV-120A	AC200V	0.13A		220V30W	37	

Bulb...12V/24V · RP35 BA15S 120V/220V · RP35 BA15D

◎:Custom order